

Conductor 24/0.2mm Order Code - Colour	Price Per Reel				
	MIXED QUANTITY PRICING				
	1+	5+	+	+	+
<b>100m Reels</b>					
117-3001 - Blue	779.00	724.00	--	--	--
117-3002 - Violet	779.00	724.00	--	--	--
117-3003 - Grey	779.00	724.00	--	--	--
117-3004 - White	779.00	724.00	--	--	--
117-3006 - Pink	779.00	724.00	--	--	--
117-3007 - Green/Yellow	779.00	724.00	--	--	--
<b>500m Reels</b>					
117-3008 - Black	3,727.00	3,542.00	--	--	--
117-3009 - Red	3,727.00	3,542.00	--	--	--
117-3010 - Yellow	3,727.00	3,542.00	--	--	--
117-3011 - White	3,727.00	3,542.00	--	--	--

32/0.2mm Type 3 (1.0mm<sup>2</sup>)

Conductor 32/0.2mm Order Code - Colour	Price Per Reel				
	MIXED QUANTITY PRICING				
	1+	5+	+	+	+
<b>100m Reels</b>					
117-3012 - Black	924.00	859.00	--	--	--
117-3013 - Brown	924.00	859.00	--	--	--
117-3014 - Red	924.00	859.00	--	--	--
117-3015 - Orange	924.00	859.00	--	--	--
117-3016 - Yellow	924.00	859.00	--	--	--
117-3018 - Green	924.00	859.00	--	--	--
117-3019 - Blue	924.00	859.00	--	--	--
117-3020 - Violet	924.00	859.00	--	--	--
117-3021 - Grey	924.00	859.00	--	--	--
117-3022 - White	924.00	859.00	--	--	--
117-3023 - Pink	924.00	859.00	--	--	--
117-3024 - Green/Yellow	924.00	859.00	--	--	--
117-3025 - Yellow/Green	959.00	904.00	--	--	--
<b>500m Reels</b>					
117-3026 - Black	4,389.00	4,170.00	--	--	--
117-3027 - Red	4,389.00	4,170.00	--	--	--
117-3028 - White	4,389.00	4,170.00	--	--	--
117-3031 - Blue	4,261.00	3,966.00	--	--	--
117-3032 - Brown	4,261.00	3,966.00	--	--	--
117-3033 - Grey	4,261.00	3,966.00	--	--	--
117-3034 - Pink	4,261.00	3,966.00	--	--	--
117-3035 - Violet	4,261.00	3,966.00	--	--	--
117-3036 - Yellow	4,261.00	3,966.00	--	--	--
117-3037 - Yellow/Green	4,261.00	3,966.00	--	--	--
117-3038 - Green/Yellow	4,389.00	4,170.00	--	--	--

63/0.2mm Type 3 (2.0mm<sup>2</sup>)

Conductor 63/0.2mm Order Code - Colour	Price Per Reel				
	MIXED QUANTITY PRICING				
	1+	5+	+	+	+
<b>100m Reels</b>					
117-3039 - Black	1,560.00	1,482.00	--	--	--
117-3040 - Red	1,486.00	1,412.00	--	--	--

24/0.2mm Type 3 (0.75mm<sup>2</sup>)

100m Reels							
Colour	Order Code	Colour	Order Code	Colour	Order Code	Colour	Order Code
Black	117-2995	Orange	117-2998	Blue	117-3001	White	117-3004
Brown	117-2996	Yellow	117-2999	Violet	117-3002	Pink	117-3006
Red	117-2997	Green	117-3000	Grey	117-3003	Green/Yellow	117-3007

500m Reels							
Colour	Order Code	Colour	Order Code	Colour	Order Code	Colour	Order Code
Black	117-3008	Red	117-3009	Yellow	117-3010	White	117-3011

Conductor 24/0.2mm Order Code - Colour	Price Per Reel				
	MIXED QUANTITY PRICING				
	1+	5+	+	+	+
<b>100m Plain Colours</b>	779.00	724.00	--	--	--
<b>100m Green/Yellow</b>	779.00	724.00	--	--	--
<b>500m Plain Colours</b>	3,727.00	3,542.00	--	--	--

32/0.2mm Type 3 (1.0mm<sup>2</sup>)


100m Reels							
Colour	Order Code	Colour	Order Code	Colour	Order Code	Colour	Order Code
Black	117-3012	Orange	117-3015	Blue	117-3019	White	117-3022
Brown	117-3013	Yellow	117-3016	Violet	117-3020	Pink	117-3023
Red	117-3014	Green	117-3018	Grey	117-3021	Green/Yellow	117-3024

500m Reels							
Colour	Order Code	Colour	Order Code	Colour	Order Code	Colour	Order Code
Black	117-3026	Red	117-3027	White	117-3028	Green/Yellow	117-3038

Conductor 24/0.2mm Order Code - Colour	Price Per Reel				
	MIXED QUANTITY PRICING				
	1+	5+	+	+	+
<b>100m Plain Colours</b>	924.00	859.00	--	--	--
<b>100m Green/Yellow</b>	924.00	859.00	--	--	--
<b>500m Plain Colours</b>	4,389.00	4,170.00	--	--	--
<b>500m Green/Yellow</b>	4,389.00	4,170.00	--	--	--

High Performance Equipment Wire

Flexlite™ Wire

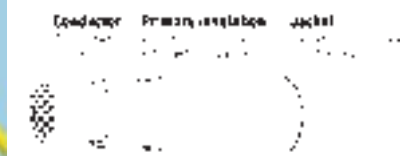

- Double wall insulation
- High dielectric strength, 2.5KV, 5 mins
- Easy stripping and handling
- Solder iron resistant
- 600V rated
- Excellent chemical resistance
- Flexible, tough, thin wall
- Low fire hazard, **UL94V-1**, non-melting
- -45°C to +125°C
- **UL recognised Style 3584**

CSA mm <sup>2</sup>	Conductor dia. min	Conductor dia. max	Max res. @ 20°C Ω/Km	Outside dia. min	Outside dia. max	Mfrs. List No. (X = colour)
0.25	0.55	0.63	83.6	1.12	1.22	FLDWC0311-0.25-0-X
0.35	0.72	0.77	56.1	1.31	1.42	FLDWC0311-0.35-0-X
0.5	0.86	0.88	40.1	1.46	1.58	FLDWC0311-0.50-0-X
0.75	1.05	1.06	24.7	1.65	1.75	FLDWC0311-0.75-0-X
1.0	1.17	1.26	20	1.78	1.93	FLDWC0311-1.00-0-X
1.5	1.35	1.58	13.7	2.19	2.34	FLDWC0311-1.50-0-X
2.5	1.85	2.01	8.2	2.65	2.83	FLDWC0311-2.50-0-X

0.25mm <sup>2</sup> (19/0.127mm)					
Colour	Order Code	Colour	Order Code	Colour	Order Code
Black	797-972	Green	797-996	White	798-010
Red	797-984	Yellow	798-009	Blue	798-022

0.35mm <sup>2</sup> (19/0.15mm)					
Colour	Order Code	Colour	Order Code	Colour	Order Code
Black	798-034	Green	769-356	White	769-370
Red	798-046	Yellow	769-368	Blue	769-381

0.50mm <sup>2</sup> (19/0.19mm)					
Colour	Order Code	Colour	Order Code	Colour	Order Code
Black	769-393	Green	769-411	White	769-435
Red	769-400	Yellow	769-423	Blue	769-447

0.75mm <sup>2</sup> (19/0.23mm)					
Colour	Order Code	Colour	Order Code	Colour	Order Code
Black	769-459	Green	769-472	White	769-496
Red	769-460	Yellow	769-484	Blue	769-502


1.00mm <sup>2</sup> (19/0.25mm)					
Colour	Order Code	Colour	Order Code	Colour	Order Code
Black	769-514	Green	769-538	White	769-551
Red	769-526	Yellow	769-540	Blue	769-563

1.50mm <sup>2</sup> (19/0.32mm)					
Colour	Order Code	Colour	Order Code	Colour	Order Code
Black	769-575	Green	769-599	White	769-617
Red	769-587	Yellow	769-605	Blue	769-629

2.50mm <sup>2</sup> (19/0.41mm)					
Colour	Order Code	Colour	Order Code	Colour	Order Code
Black	769-691				

Conductor 24/0.2mm Order Code - Colour	Price Per Reel				
	MIXED QUANTITY PRICING				
	1+	5+	+	+	+
<b>100m Reels</b>					
<b>0.25mm<sup>2</sup> All Colours</b>	2,085.00	2,002.00	--	--	--
<b>0.35mm<sup>2</sup> All Colours</b>	2,572.00	2,468.00	--	--	--
<b>0.50mm<sup>2</sup> All Colours</b>	2,917.00	2,801.00	--	--	--
<b>0.75mm<sup>2</sup> All Colours</b>	3,512.00	3,371.00	--	--	--
<b>1.00mm<sup>2</sup> All Colours</b>	4,227.00	3,952.00	--	--	--
<b>1.50mm<sup>2</sup> All Colours</b>	5,364.00	5,478.00	--	--	--
<b>2.50mm<sup>2</sup> All Colours</b>	9,936.00	9,482.00	--	--	--

Spec 44™ Wire and Cable

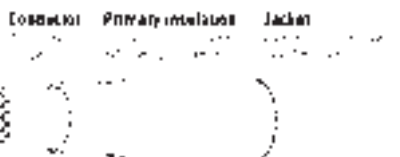

- Suitable for applications where environmental conditions demand consistently reliable performance
- Voltage rating 600V
- Dual wall construction
- Soldering iron resistant +300°C (short periods)
- Operating temperature -65°C to +150°C
- Small size, light weight
- Flame retardant
- Low smoke and low corrosive gas generation
- Resistant to most chemicals