


# SOT223 NPN SILICON PLANAR HIGH CURRENT (HIGH PERFORMANCE) TRANSISTORS

**FZT851**  
**FZT853**

ISSUE 2 - OCTOBER 1995

## FEATURES

- \* Extremely low equivalent on-resistance;  $R_{CE(sat)}$  **44mΩ at 5A**
- \* 6 Amps continuous current, up to 20 Amps peak current
- \* Very low saturation voltages
- \* Excellent  $h_{FE}$  characteristics specified up to 10 Amps



PARTMARKING DETAILS - DEVICE TYPE IN FULL

COMPLEMENTARY TYPES - FZT851 FZT951

FZT853 FZT953

## ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	FZT851	FZT853	UNIT
Collector-Base Voltage	$V_{CBO}$	150	200	V
Collector-Emitter Voltage	$V_{CEO}$	60	100	V
Emitter-Base Voltage	$V_{EBO}$	6	6	V
Peak Pulse Current	$I_{CM}$	20	10	A
Continuous Collector Current	$I_C$	<b>6</b>		<b>A</b>
Power Dissipation at $T_{amb}=25^{\circ}C$	$P_{tot}$	<b>3</b>		<b>W</b>
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150		$^{\circ}C$

\*The power which can be dissipated assuming the device is mounted in a typical manner on a P.C.B. with copper equal to 4 square inch minimum

# FZT853


## ELECTRICAL CHARACTERISTICS $T_{amb} = 25^{\circ}\text{C}$ (atunless otherwise stated)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	200	300		V	$I_C=100\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{(BR)CER}$	200	300		V	$I_C=1\mu\text{A}$ , $R_B \leq 1\text{k}\Omega$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	100	120		V	$I_C=10\text{mA}^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	6	8		V	$I_E=100\mu\text{A}$
Collector Cut-Off Current	$I_{CBO}$			10 1	nA $\mu\text{A}$	$V_{CB}=150\text{V}$ , $T_{amb}=25^{\circ}\text{C}$ $V_{CB}=150\text{V}$ $T_{amb}=100^{\circ}\text{C}$
Collector Cut-Off Current	$I_{CER}$ $R \leq 1\text{k}\Omega$			10 1	nA $\mu\text{A}$	$V_{CB}=150\text{V}$ , $T_{amb}=25^{\circ}\text{C}$ $V_{CB}=150\text{V}$ $T_{amb}=100^{\circ}\text{C}$
Emitter Cut-Off Current	$I_{EBO}$			10	nA	$V_{EB}=6\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		14 100	50 150 340	mV mV mV	$I_C=0.1\text{A}$ , $I_B=5\text{mA}^*$ $I_C=2\text{A}$ , $I_B=100\text{mA}^*$ $I_C=5\text{A}$ , $I_B=500\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$			1250	mV	$I_C=5\text{A}$ , $I_B=500\text{mA}^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$			1100	mV	$I_C=5\text{A}$ , $V_{CE}=2\text{V}^*$
Static Forward Current Transfer Ratio	$h_{FE}$	100 100 50 20	200 200 100 30	300		$I_C=10\text{mA}$ , $V_{CE}=2\text{V}$ $I_C=2\text{A}$ , $V_{CE}=2\text{V}^*$ $I_C=4\text{A}$ , $V_{CE}=2\text{V}^*$ $I_C=10\text{A}$ , $V_{CE}=2\text{V}^*$
Transition Frequency	$f_T$		130		MHz	$I_C=100\text{mA}$ , $V_{CE}=10\text{V}$ $f=50\text{MHz}$
Output Capacitance	$C_{obo}$		35		pF	$V_{CB}=10\text{V}$ , $f=1\text{MHz}$
Switching Times	$t_{on}$ $t_{off}$		50 1650		ns ns	$I_C=1\text{A}$ , $V_{CC}=10\text{V}$ $I_{B1}=I_{B2}=100\text{mA}$ ,


\*Measured under pulsed conditions. Pulse width=300 $\mu\text{s}$ . Duty cycle  $\leq 2\%$   
Spice parameter data is available upon request for this device

# FZT853


## TYPICAL CHARACTERISTICS

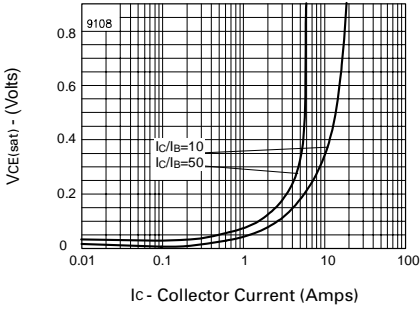


**$V_{CE(sat)}$  v  $I_C$**

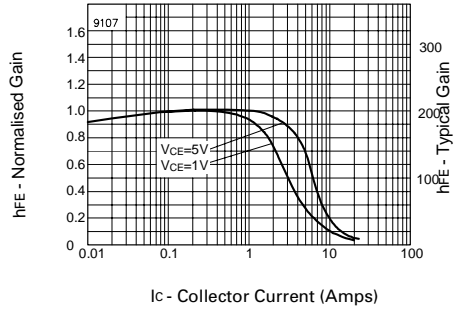


**hFE v  $I_C$**

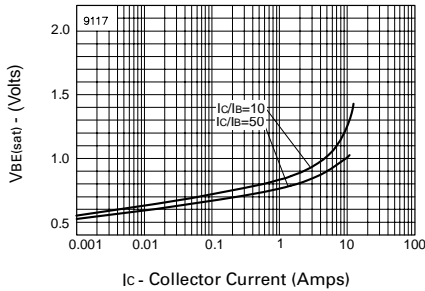

**$V_{BE(sat)}$  v  $I_C$**

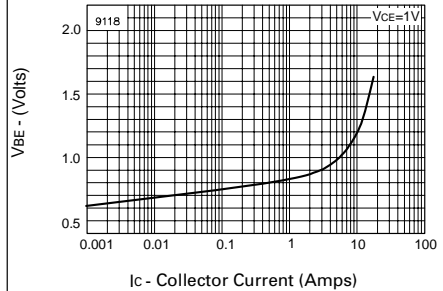

**$V_{BE(on)}$  v  $I_C$**

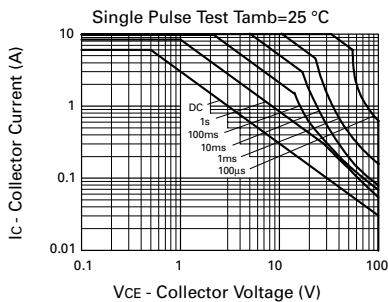

**Safe Operating Area**