

Cable Markers Identification Tags

HellermannTyton



- Cable identification tags manufactured in Natural Nylon 66
- Can be attached to a cable or group of cables using two cable ties
- Marking can be carried out using hot foil printing or an indelible marking pen


FOR SUITABLE CABLE TIES SEE **PAGE 154**

CAB640

100 Per Pack	Order Code	1+	5+	10+	25+
Identification Tags	317-8572				
			Price Each		
		1+	5+	10+	25+
Black Marker Pen	305-3570				

Cable Grommets

PVC

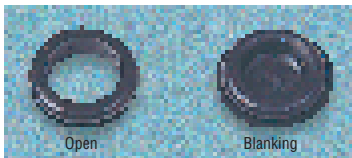

A range of Black PVC grommets for all general industrial installation type uses.

Maximum panel thickness 1.6 (except Order Code 150-437, max. 1.2)
Operating temperature -35°C to +70°C

Panel Hole Diameter	Max. Cable Diameter	Outside Diameter	Overall Thickness	Order Code
Open Grommets				
4.8	3.2	8.0	6.4	◆152-331
6.4	4.0	9.5	4.0	150-437
6.4	4.0	9.5	6.4	◆152-332
6.4	4.8	9.5	7.1	◆152-333
8.0	4.8	11.1	6.4	◆152-334
9.5	4.8	12.7	5.6	◆152-335
9.5	6.4	12.7	4.8	◆152-336
9.5	6.4	14.3	6.4	◆152-337
9.5	7.5	13.5	6.4	◆150-438
9.5	8.0	14.3	4.8	◆152-338
10.3	8.0	15.9	6.4	◆152-339
11.1	7.2	15.9	6.4	◆152-340
11.1	8.0	14.3	4.8	◆152-341
11.9	6.4	15.9	8.0	◆152-342
11.9	9.5	17.5	6.8	◆152-343
12.7	9.5	15.9	6.3	◆150-439
14.3	11.1	19.0	6.4	◆152-344
19.0	12.7	25.4	6.4	◆152-345
20.0	15.9	23.8	6.4	◆150-440
25.4	19.0	30.0	7.5	150-441
Blanking Grommets				
15.9	—	22.2	—	150-456
20.0	—	25.4	—	150-457
25.4	—	31.8	—	150-458

Note: All items marked ◆ are included in the **PVC Grommet Kit**, see below.

137X

100 Per Pack	Order Code	1+	5+	10+	25+	50+
Open	152-331					
	150-437					
	152-332					
	152-333					
	152-334					
	152-335					
	152-336					
	152-337					
	150-438					
	152-338					
	152-339					
	152-340					
	152-341					
	152-342					
	152-343					
	150-439					
	152-344					
	152-345					
	150-440					
	150-441					
Blanking	150-456					
	150-457					
	150-458					

PVC Grommet Kit




A kit of 18 different sizes of grommets suitable for use with 1.6mm thick panels. The kit covers a range of panel hole sizes from 4.8mm to 20mm, with cable hole diameters ranging from 3.2mm to 15.9mm. Supplied in an 18 compartment storage box.

No. of Grommets in kit 450
Max. operating temperature +70°C

138X

Order Code	1+	5+	10+
151-201			

Rubber




136X

100 Per Pack	Order Code	1+	5+	10+
Chassis Hole				
9.5	303-161			
12.7	303-173			
Cable Entry				
6.35				
9.5				

Grommet Strip

Rayrim™ Adhesive
Panel Edging

tyco / Electronics / **Raychem**



- Extruded edging strip internally coated with heat activated adhesive
- Heating changes profile from 'V' to a 'U' section
- Utilises radiation cross-linked polyolefin
- Applies to both internal and external radii and straight edges
- Bonds to metal, wood or glass edges
- Installation temperature, 150°C to 200°C
- -55°C to 80°C operating temperature

A (max)	B (min)	C (min)	D (min)	E (typical)	Mftrs. List No.	Order Code	1.2m	5m
0.6	0.5	3.5	0.8	1.25	RAYRIMNR6	769-174	134-727	
1.0	0.9	4.8	1.6	1.25	RAYRIMNR7	769-186	134-739	
2.0	0.9	6.6	2.5	2.25	RAYRIMNR8	769-198	134-740	
4.2	0.9	13.5	4.5	2.20	RAYRIMNR9	769-204	134-752	

435

Panel Thickness (max)	Order Code	1+	25+	100+	250+
1.2m Length					
0.6	769-174				
1.0	769-186				
2.0	769-198				
4.2	769-204				
5m Length					
0.6	134-727				
1.0	134-739				
2.0	134-740				
4.2	134-752				

continued