


	Mfrs. List No.	Order Code	Price Per Reel			
			1+	5+	10+	20+
Fixed Male Connector	GAM0404 FEC	718-9114				
	GAM0505 FEC	718-9126				
	GAM0605 FEC	718-9138				
	GAP0405 FEC	718-9140				
	GAP0506 FEC	718-9151				
Swivel Male Connector	GAP0607 FEC	718-9163				
	GBM0404 FEC	718-9175				
	GBM0505 FEC	718-9187				
	GBM0606 FEC	718-9199				
	GBP0405 FEC	718-9205				
	GBP0506 FEC	718-9217				
	GBP0607 FEC	718-9229				

Polyethylene – Betaflex 1



- Manufactured from flame retardant, high density polyethylene
- Ideal for sub-zero temperatures (-50°C to +55°C)
- Excellent flexibility
- Accessories include adaptors and lock ring for panel fixing, saddles, and couplings for joining lengths of conduit

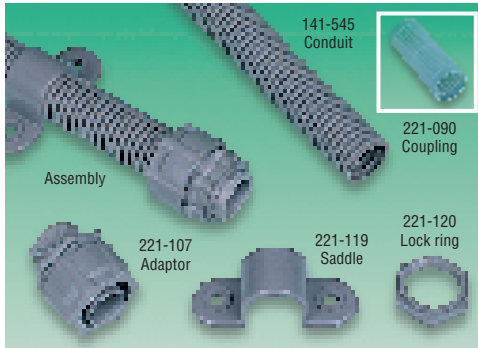

SEC135X

5m Coil	Mfrs. List No.	Order Code	Price Each			
			1+	5+	10+	25+
20mm Conduit	0839	.141-545				
			Price Per Pack			
10 per Pack			1+	5+	10+	
Coupling	133000010 Grey	.221-090				
Adaptor	0508 24313010 Grey	.221-107				
Saddle	0853 24523010 Grey	.221-119				
Lock ring	0568 24333010 Grey	221-120				

Spirally Reinforced PVC – IP65 – Betaflex 2 'FL' and 'HD' Flexible Types



- Manufactured with a hardened PVC spiral to meet **BS4607** crush strength requirements
- Self-extinguishing (all burning ceases within 2 seconds of flame removal)
- Chemical and heat resistant
- Sealing to **IP65 (IEC and DIN40050)**
- Standard type has a soft PVC wall for high flexibility and light weight construction
- Heavy duty type is a more rugged construction with smooth walls and greater crush resistance but less flexibility
- Straight fittings and 90° elbows are suitable for both standard and heavy duty conduit. Manufactured from polypropylene.

Operating temperature range -25°C to +75°C Material Black flame retardant PVC

SEC141X

10m Reel Conduit – O.D./I.D.	Mfrs. List No.	Order Code	Price Each			
			1+	5+	10+	150+
Standard						
16mm/12mm	25001610	152-585				
20mm/16mm	25002010	152-586				
25mm/22mm	25002510	152-587				
Heavy Duty						
16mm/12mm	25031610	152-588				
20mm/16mm	25032010	152-589				
25mm/22mm	25032510	152-590				
Straight Fittings						
Conduit/PG Threads			1+	50+	100+	150+
16mm/PG11	25051611	152-591				
16mm/PG13.5	25051613	152-592				
20mm/PG13.5	25052013	152-593				
20mm/PG16	25052016	152-594				
25mm/PG21	25052500	152-595				
ISO Metric Threads						
16mm	25061600	152-596				
20mm	25062000	152-597				
25mm	25062500	152-598				
90° Elbows						
Conduit/PG Threads						
16mm/PG11	25131611	152-599				
20mm/PG13.5	25132013	152-601				
ISO Metric Threads						
16mm	25141600	152-605				
20mm	25142000	152-606				
25mm	25142500	152-607				

Online Catalogue!
Another Farnell first!
100,000 products available for ordering online
at www.farnell.com

Any Questions?
Our technical help desk will provide the
answers, free of charge.
Please call (65) 788 1922
or e-mail singapore-technical@farnell.com

Value for Money
When you're looking for quality and cost
effectiveness check out some of our
thousands of Best Value products.