


Hand-Held & Instrument — continued

Two Tone – ‘Element’
PS




- High impact resistant polystyrene cases with knockouts for wall mounting
- Four internal posts allow mounting of PCBs
- Screw holes have recesses which accept sealing compound for tamper proofing
- Operating temperature -40°C to 65°C

External Dimensions			Standard Order Code
H	W	D	
25	50	100	279-160
40	50	100	279-171
40	65	120	279-183
65	65	120	279-195
55	80	150	279-201
80	80	150	279-213
70	110	188	279-225
100	110	188	279-237

BOX20

Order Code	Price Each				
	1+	10+	25+	50+	100+
279-160					
279-171					
279-183					
279-195					
279-201					
279-213					
279-225					
279-237					

Two Tone – ‘Elegant’
PS

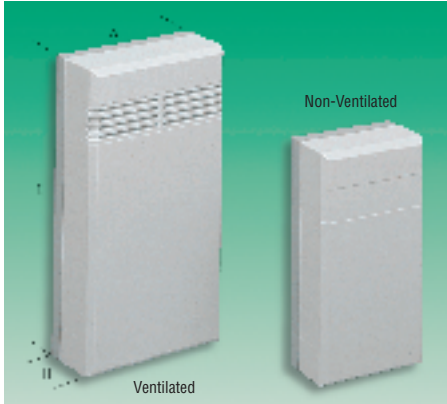

- Two part Impact resistant polystyrene construction
- Table top and wall mounting design
- PCB Mountings available in lid and base
- Ventilated type available for sounders, alarms, etc
- Textured lid
- Agate grey/Light grey (similar RAL7038/RAL7035) colour
- Supplied with lid fixing screws


Operating temperature -40°C to +65°C

External Dimensions			PCB Centres		Ventilated Order Code	Non-Ventilated Order Code
H	W	D	Top	Bottom		
30	67	125	97/30	39 86 48	—	480-824
50	67	125	97/30	39 86 48	480-850	—
45	82	150	122/40	54 116 63	—	480-873
60	82	150	112/40	54 116 63	480-897	—
50	112	200	172/44	84 153.7* 84	480-927	480-915
70	112	200	172/44	84 153.7* 84	—	480-939

BOX96

External Dimensions			Price Each					
H	W	D	Order Code	1+	10+	25+	50+	100+
Ventilated								
40	67	125	480-850					
60	82	150	480-897					
50	112	200	480-927					
Non-Ventilated								
30	67	125	480-824					
45	82	150	480-873					
50	112	200	480-915					
70	112	200	480-939					

Window ‘Datec Mobil’ (Battery Compartment)
ABS

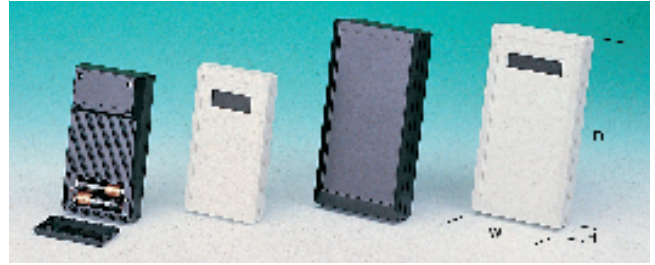

- Stylish, robust and ergonomic ABS cases with top recess for membrane key pads
- Ideal for test and measurement, data-loggers and other hand held instruments
- Two sizes M & S in two colours off-white and black
- With or without LCD display window aperture
- Battery compartments: M takes 4 AA and S takes 2 AA or 1 PP3 cells
- Internal mounting pillars in top and base for PCBs
- Order separately the size M battery compartment and battery clips

Operating temperature -40°C to +90°C

	External Dimensions			Recess Area	Window Area	Mfrs. List No.	Order Code
	H	W	D				
M off-white	44	101	195	81 168	No window	A9074107	774-730
M black	44	101	195	81 168	No window	A9074109	774-753
M black	44	101	195	81 168	60 15	A9074209	775-939
S off-white	33.5	83	152	68 129.5	No window	A9073107	774-765
S black	33.5	83	152	68 129.5	No window	A9073109	774-789
S black	33.5	83	152	68 129.5	45.6 17.7	A9073209	774-790
Battery Compartment for size M (pre-moulded in size S case)						A9174004	774-807
Battery clips set for 4 AA cells for size M						A9161001	774-819
Battery clips set for 2 AA cells for size S						A9174004	774-820

BOX171

	Price Each				
	Order Code	1+	10+	25+	50+
Size M Case Without Window					
Off-White	774-730				
Black	774-753				
Size M Case With Window					
Black	775-939				
Size Case Without Window					
Off-White	774-765				
Black	774-789				
Size S Case With Window					
Black	774-790				
Accessories					
Battery Compartment for M	774-807				
Battery Clips For Size M	774-819				
Battery Clips For Size S	774-820				

Hand-held Radius – ‘HR Series’
ABS



- Moulded in ABS
- Recessed lids allow for membrane switch and overlay
- Includes 1 x PP3 battery compartment
- Sleek radius design with moulded-in external gripping features
- PCB mounting bosses moulded in
- All necessary hardware supplied



‘HR’ Model

- Two piece assembly: Top and bottom covers

‘HRP’ Model

- Three piece assembly: Top and bottom cover and a front ABS blank radius panel

BOX275

External Dimensions				Colour	Order Code	Price Each		
H	W ₁	W ₂	D			1+	10+	25+
‘HR’ Model								
24	47	47	152	Black	318-4298			
24	47	47	152	PC bone	318-4304			
‘HR-P’ Model with Panel								
24	69	45	139	Black	318-4316			
24	69	45	139	PC bone	318-4328			