


Triaxial - Insulated Series

Insulated Twinaxial Series 95Ω
Cable Plugs, Adaptors and Dust Caps

Best value **multicomp**

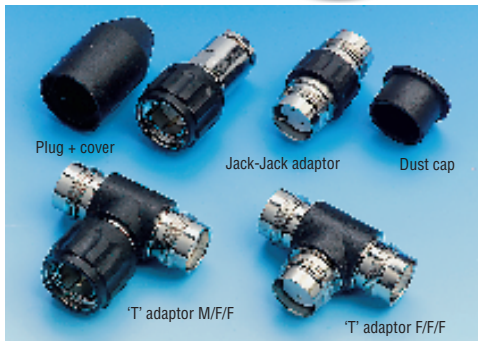

- Insulated plugs, adaptors and dust caps
- Polycarbonate overmoulded bodies
- Protection against accidental grounding
- Nickel plated brass connectors
- Gold plated contacts
- 95Ω nominal impedance
- Suitable cable 9207

FOR SUITABLE TWINAXIAL CABLE SEE ORDER CODE 146-029 GROUP H334
PAGE 127

cr130

	Order Code	1+	10+	50+	150+
95Ω Plug	779-910				
Bulkhead Socket	746-745				
Jack-Jack Adaptor	779-921				
Dust Cap	779-775				
'T' Adaptor M/F/F	779-945				
'T' Adaptor F/F/F	779-933				

Twinaxial - 70000 Series

Twinaxial 70000 Series
Plug and Adaptor 105Ω

tyco / *Electronics* / **M/A-COM**



Plug
L = 44.5, Dia = 22.2

Straight
Adaptor

- Twin screened connectors with high immunity to electrical interference. By the virtue of a balanced line system, they are fully compatible with IBM System 34, 36 and 38. Bright nickel plated bodies and silver plated contacts. Impedance is 105Ω.

FOR SUITABLE TWINAXIAL CABLE SEE ORDER CODE 146-029 GROUP H334
PAGE 127

cr190

	Order Code	1+	10+	50+	150+	250+	500+
Plug	.310-372.†						
Straight Adaptor	.310-396.†						

† Available until stocks are exhausted


Twinaxial - 70 Series

PCB Bulkhead Jacks

TROMPETER
ELECTRONICS, INC.



New

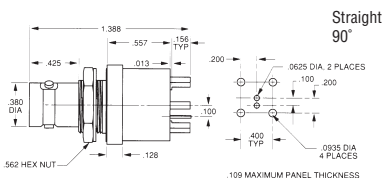

Mftrs. List No.	Order Code
CBBJ79	356-4060
CBBJR79	356-4071

CRF167

	Order Code	1+	10+	25+	100+	250+	500+
	356-4060						
	356-4071						

Solder and Feed Through Jacks

TROMPETER
ELECTRONICS, INC.

New



	Mftrs. List No.	Order Code
Bulkhead Jack (Solder)		
Front mount (insulated)	BJ72	356-4009
Rear mount (insulated)	BJ75	356-4022
Front mount	BJ70	356-4046
Rear mount	BJ76	356-4034
Feed Through		
Insulated	BJ73	356-4010
Non-insulated	BJ78	356-4058

CRF168


	Order Code	1+	10+	25+	100+	250+	500+
	356-4009						
	356-4022						
	356-4046						
	356-4034						
	356-4010						
	356-4058						

Standard Cable Plugs

TROMPETER
ELECTRONICS, INC.

- Nickel body
- Gold plated centre contact

New

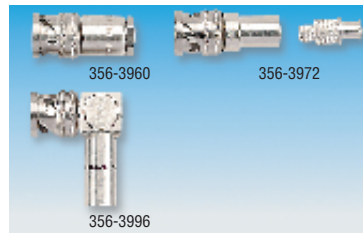

Voltage rating (max) 400Vrms (sea level)
Insulation resistance 5000MΩ
Frequency range 0 – 500Mhz

Cable (Belden)	Mftrs. List No.	Order Code
Plug		
9272	PL75-9	356-3960
Crimp Plug		
9272	PL75C-213	356-3972
90° Crimp Plug		
9222	PLR74C-306	356-3984
9272	PLR75C-213	356-3996

CRF169

	Order Code	1+	10+	25+	100+	250+	500+
	356-3960						
	356-3972						
	356-3984						
	356-3996						

Patch Jack

TROMPETER
ELECTRONICS, INC.

New



CRF170

	Mftrs. List No.	Order Code	1+	10+	25+	100+	250+	500+
3 Lug	J72	356-4083						

Twinaxial - Sub Miniature

150 Series

TROMPETER
ELECTRONICS, INC.

- Concentric twinax/triax push on connectors, for high density applications
- Ideal for digital data bus, video pair and baseband circuits
- Cable plugs, bulkhead and PCB jacks

CRF163