

Dimensions	Height	Width	Depth
194EE25/E32	64mm	45mm	60mm
194EE40/E63	72mm	54mm	74mm
194EE80/E100	90mm	72mm	90mm


Power Rating	Current Rating	Product Code	Order Code
11kW	25A	194EE2517536N	351-4110
15kW	32A	194EE3217536N	351-4122
18.5kW	40A	194EE4017536N	351-4134
22kW	63A	194EE6317536N	351-4146
37kW	80A	194EE8017536N	351-4158
45kW	100A	194EE10017536N	351-4160

PR0541

Rating	Order Code	Price Each	
		1+	5+
11kW, 400V	351-4110		
15kW, 400V	351-4122		
18.5kW, 400V	351-4134		
22kW, 400V	351-4146		
37kW, 400V	351-4158		
45kW, 400V	351-4160		

Switch Disconnectors 3 Pole Base Mounted c/w Handle

Rockwell Automation

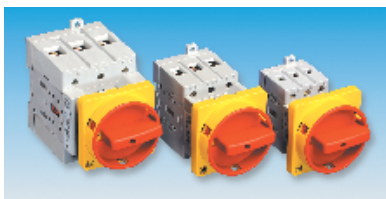

- Fully conform to IEC204 and IEC947
- IP65 rated
- Modular, highly flexible assembly system
- Complete with operating shaft and handle
- Excellent AC3/AC23A ratings
- Single or double pole side mounted auxiliary contacts
- 4th pole fitted to side of switch body (order separately) see page opposite
- Neutral or ground terminal can be added
- Finger proof switch body (IP20)
- Easily accessible terminals
- Compact design


New

PR0542

Mfrs. List No.	Current Rating	Order Code	Price Each	
			1+	5+
194E-A25-1753-6N	25A	351-4511		
194E-A32-1753-6N	32A	351-4523		
194E-A40-1753-6N	40A	351-4535		
194E-A63-1753-6N	63A	351-4547		
194E-A80-1753-6N	80A	351-4559		
194E-A100-1753-6N	100A	351-4560		

Accessories – Extension Shafts Metal + Plastic

Rockwell Automation

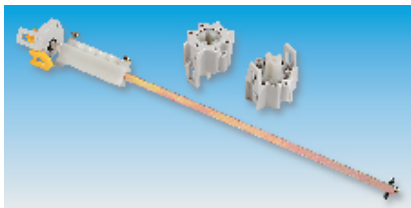

- Metal and plastic options
- **Metal:** Length 110...235mm length 230...350mm
- Provision for locking in position 0 by padlock
- **Plastic:** Pack containing 2 pcs 1 piece length = 24mm Includes coupling piece


New

PR0545

Mfrs. List No.	Typ	Length	Order Code	Price Each	
				1+	5+
194L-G3393	Metal	110-235mm	351-4171		
194L-G3394	Metal	230-350mm	351-4183		
194L-G2853	Plastic	24mm x 2	351-4195		

Switch Disconnects – Accessories

Rockwell Automation



New

- Terminal covers for 3 and 4 pole switches
- Provides additional shrouding for switch bodies

PR0546

Mfrs. List No.	Terminal Size	Order Code	Price Each	
			1+	5+
3 Pole				
194E-25-C3	25-32A	351-4780		
194E-40-C3	40-63A	351-4791		
194E-80-C3	80-100A	351-4808		
4 Pole				
194E-25-C4	25-32A	351-4810		
194E-40-C4	40-63A	351-4821		
194E-80-C4	80-100A	351-4833		

Switch Disconnects Accessories

Rockwell Automation



Fourth Poles

- 4th pole is early-make, late break
- Fitted to side of switch body without the use of tools
- Rated to suit switch rating
- Add on facility reduces stock holding
- Finger proof (IP20)
- Easily accessible terminal connections

Earth Terminal

- Earth terminal
- Can be fitted to either side of the switch body
- Add on facility reduces stock holding
- Finger proof (IP20)
- Easily accessible terminal connections
- Selection according to switch body size

Neutral Terminal

- Fully rated neutral
- Can be fitted to either side of the switch body
- Add on facility reduces stock holding
- Finger proof (IP20)
- Easily accessible terminal connections
- Selection according to switch body size

Auxiliary Blocks

- Three block types fit all switches 25A – 100A front and base mounted
- 1 n/o + 1 n/c contact block (P11)
- 1 n/o + 1 n/c make before break contact block (PL11)
- 2 n/o + 2 n/c contact block (P22)
- Snap of fitting to either side of switch body
- Auxiliary contacts rated at 17 vdc, 5 ma as per DIN 19240

New

Mfrs. List No.	Rating	Front Mount	Base Mount	Price Each	
				1+	5+
Fourth Pole Terminal					
194E-25-NP	25A	351-4365	351-4638		
194E-32-NP	32A	351-4377	351-4640		
194E-40-NP	40A	351-4389	351-4651		
194E-63-NP	63A	351-4390	351-4663		
194E-80-NP	80A	351-4407	351-4675		
194E-100-NP	100A	351-4419	351-4687		
Earth Terminal					
194E-32-PE	25-32A	351-4456	351-4729	1+	5+
194E-63-PE	40-63A	351-4468	351-4730		4.
194E-100-PE	80-100A	351-4470	351-4742		
Neutral Terminal					
194E-P11	1NO+1 NC	351-4481	351-4754	1+	5+
194E-PL11	1NO+1 NC	351-4493	351-4766		
194E-P22	2NO+2 NC	351-4500	351-4778		
Auxiliary Blocks					
194E-32-TN	25-32A	351-4420	351-4699	1+	5+
194E-63-TN	40-63A	351-4432	351-4705		
194E-100-TN	80-100A	351-4444	351-4717		

PR0521

continued