


Project & General Purpose — continued

Multipurpose IP65, PC

multicomp



- Polycarbonate boxes sealed to IP65
- Wall mounting holes and lid fixing screws outside sealed area
- Operating temperature range -40°C to +100°C

Best value

External Dimensions			D ₂	Wall Thickness	Order Codes
H	W	D ₁			
50	52	35	10	3.0	316-5681
58	65	35	10	3.0	466-141
65	115	40	15	3.0	466-153
65	115	55	15	3.0	466-165
80	82	55	15	3.0	316-5693
90	115	55	15	3.0	466-177
90	115	80	15	3.0	579-646
120	120	60	30	3.0	316-5735
120	120	90	30	3.0	316-5747
121	171	55	15	3.0	466-189
121	171	80	40	3.0	579-671
80	195	55	10	3.0	579-695
146	222	55	15	3.0	466-190
146	222	75	35	3.0	579-725
160	80	55	15	3.0	316-5700
160	80	85	15	3.0	316-5711
160	160	60	30	3.0	316-5759
160	160	90	30	3.0	316-5760
200	120	75	15	3.0	316-5723

Order Code	Price Each			
	1+	25+	50+	100+
NEW 316-5681				
466-141				
466-153				
466-165				
NEW 316-5693				
466-177				
579-646				
NEW 316-5735				
NEW 316-5747				
466-189				
579-671				
579-695				
466-190				
579-725				
NEW 316-5700				
NEW 316-5711				
NEW 316-5759				
NEW 316-5760				
NEW 316-5723				

RFI/EMI Shielded – 'Series HF' IP66, GRP

spelsberg
Installationsmaterial mit Pfiff




- Glass Reinforced Polycarbonate moulding. Sealed to IP66.
- Flammability tested to UL94V-1. Halogen free material.
- Internally aluminium coated to provide EMC screening
- Resistant to alcohols, petrol, fats and acids
- Integral earth terminal. Quick release plastic screws.
- Finished in light grey (RAL7035)
- Note - Picture does not represent internal colour

External Dimensions			Mfrs. List No.	Order Code	Price Each		
H	W	D			1+	10+	25+
94	94	57	HF99	.651-590			
110	110	66	HF1111	.651-606			
94	130	57	HF1309	.651-618			
130	130	75	HF1313	.651-620			
180	182	90	HF1818	.651-643			
180	254	90	HF2518	.651-655			

BOX134

EE'e' Multipurpose – 'Compact' GRP

BERNSTEIN

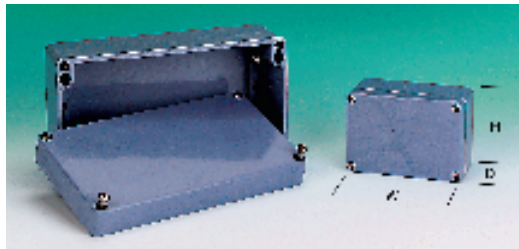

- Manufactured from high impact glass fibre reinforced grey polyester (RAL 7000)
- High resistance to most chemicals including oil, petrol, saltwater and acid
- Ex type approval - EExe IIT6 and EExe (ia) IIC T6
- Inserts fitted for internal mounting plate, PCB or DIN rail fixing
- Excellent material for aggressive corrosive atmospheres
- Lid screws are stainless steel




BOX189

External Dimensions			Order Code	Price Each			
H	W	D		1+	10+	25+	50+
75	80	55	767-505				
75	80	75	767-517				
75	110	55	767-529				
75	110	75	767-530				
75	160	55	767-542				
75	160	75	767-554				
75	190	55	767-566				
75	190	75	767-578				
120	122	90	767-580				
120	220	90	767-591				
160	160	90	767-608				
160	260	90	767-610				
160	255	90	767-621				
160	560	90	767-633				
250	255	120	767-645				
250	400	120	767-657				

EE 'e' Multipurpose 'Kestrel' IP66/IP68, GRP (Flame Retardant)

Weidmüller

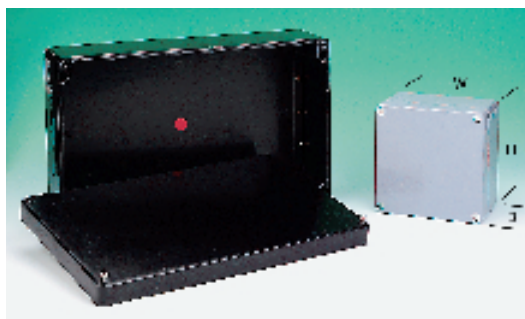

- Glass Reinforced Polyester (GRP) moulding with silicon rubber gasket
- Corrosion resistant with high impact strength
- CENELEC approved. Suitable for indoor or outdoor use
- Flame retardant to UL94V-0. Toxicity is halogen and cadmium free
- May be used in Zone 1 or Zone 2 hazardous area
- Available in black (RAL 9011) or grey (RAL7001) finish
- Temperature range -40°C to 130°C

