Type	Mftrs. List No.	Order Code	Price Each 1+	4+	10+	20+	50+
Nugget 30 Electrical Connector	VO25516A-Q2010	**700-4680**					

Manifold Stations

NORGREN

Nugget 30 Manifold Station

- Manifolds for Nugget 30 valves
- Blanking plate for unwanted manifold positions



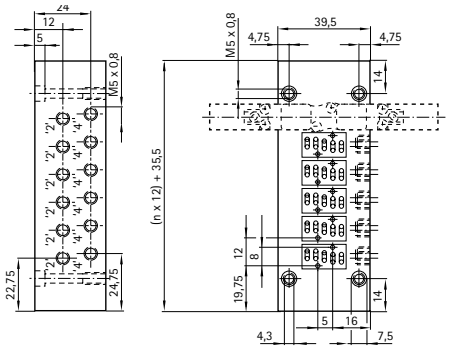

pne32

Type	Mftrs. List No.	Order Code	Price Each 1+	4+	10+	20+
2 Position	M/P43149/2	**700-4552**				
4 Position	M/P43149/4	**700-4564**				
6 Position	M/P43149/6	**700-4576**				
Blanking Plate	M/P43165	**700-4588**				

Nugget 40 Micro Valves

High-Flow Compact Valves

NORGREN



Nugget 40 High-Flow Compact Valves

- High flow from 17mm body width
- Low power solenoids with a range of voltages
- Use valves singly or with low profile fixed length manifold
- 24V, 110V and 220V coils available

Electrical Connector

- Connector type DIN 43650 form C
- Moulded cable length 3 metres
- Built-in suppression and green LED
- **IP65** protection

Please note the Nugget 40 Valves are sold without the coils or plugs, please order these separately.



Single Solenoid Valve



Double Solenoid Valve

Medium	Compressed air, filtered, lubricated and non-lubricated
Operation	Spool valve, indirectly actuated
Mounting	Through-holes in valve body
Port Size	M5
Operating Pressure	Maximum 10 bar
Temperature	Pilot Models -20° C to +80° C; Solenoid Models -20° C to +50° C

pne34

Type	Mftrs. List No.	Order Code	Price Each 1+	4+	10+	20+	50+
Valves							
5/2 Sol/Spring	VO85516A-B200A	**700-4874**					
5/2 Sol/Sol	VO85511A-B200A	**700-4886**					
5/2 Pilot/Spring	VO85536A-XO130	**700-4898**					
5/2 Pilot/Pilot	VO85533A-XO020	**700-4904**					
Coils							
24V Coil	V10025-A13	**700-5234**					
110V Coil	V10025-A18	**700-5246**					
220V Coil	V10025-A19	**700-9203**					
Connectors							
24V dc	V10014-D03	**700-5910**					
110V ac	V10015-D03	**700-5921**					
220V ac/dc	V10016-D03	**722-4023**					

Electrical Connector

NORGREN

Indicator Plug with Moulded Cable

- Connector type **DIN 43650 form C**
- Moulded cable length 3 metres
- Built-in suppression and green LED
- IP65 protection
- Suitable for use with Nugget 40 (and 120) valves

Voltage V10014-D03 = 24V dc, 700-5910
Voltage V10015-D03 = 110V ac, 700-5921
Voltage V10016-D03 = 220V ac/dc, 722-4023
The conductor cross section is 3 0.5mm ².

pne37

Voltage	Mftrs. List No.	Order Code	Price Each 1+	4+	10+	20+
24V dc	V10014-D03	**700-5910**				
110V dc	V10015-D03	**700-5921**				
220V ac/dc	V10016-D03	**722-4023**				

Manifold Stations

NORGREN



Nugget 40 Manifold Station

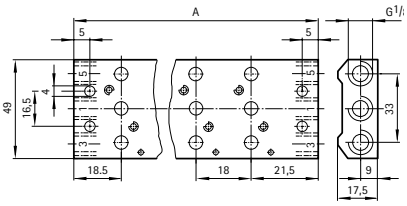

- For Nugget 40 valves
- 2 to 6 stations available

These units are sold complete with seals and mounting bolts.

pne36

Type	Mftrs. List No.	Order Code	Price Each 1+	4+	10+	20+	50+
2 position	V10026-G02	**700-5714**					
4 position	V10026-G04	**700-5726**					
6 position	V10026-G06	**700-5738**					
Blanking plate	V095516A-Q1100	**700-5740**					

Total Customer Care

Our aim is to ensure you are 100% satisfied. If you ever have a query with your order, call us on (65) 788 0200