


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 (C) COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
CF	39	P	LTR	DESCRIPTION	DATE	DWN	APVD
		0		REL PER PR 98-7922-039	7/20/98	DGG	KB
		A		REVISED PER 0B20-0515-99	06/18/99	MM	LW

WIRING DIAGRAM

P1	WIRE COLOR	AWG
1	RED	24
2	WHITE	28
3	GREEN	28
4	BLACK	24
SHELL	SHIELD	-

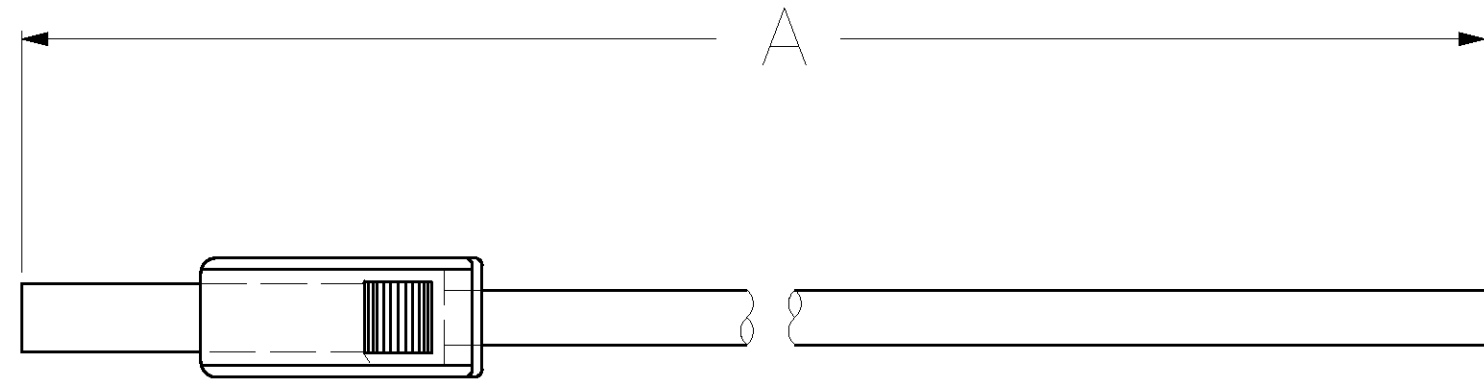

- 1 MATERIAL:
FRONT AND REAR SHELLS- STEEL.
HOUSING- UL 94V-0 RATED THERMOPLASTIC, BLACK.
OVERMOLD - PVC, COLOR: FROST WHITE.
- 2 FINISH:
FRONT AND REAR SHELLS - TIN PLATED.
- 3. FINAL CABLE ASSEMBLY LENGTH LONGER THAN 2000mm EXCEEDS MAX LENGTH @ MAX CONDITIONS PER UNIVERSAL SERIAL BUS SPEC PARAGRAPH 6.4.

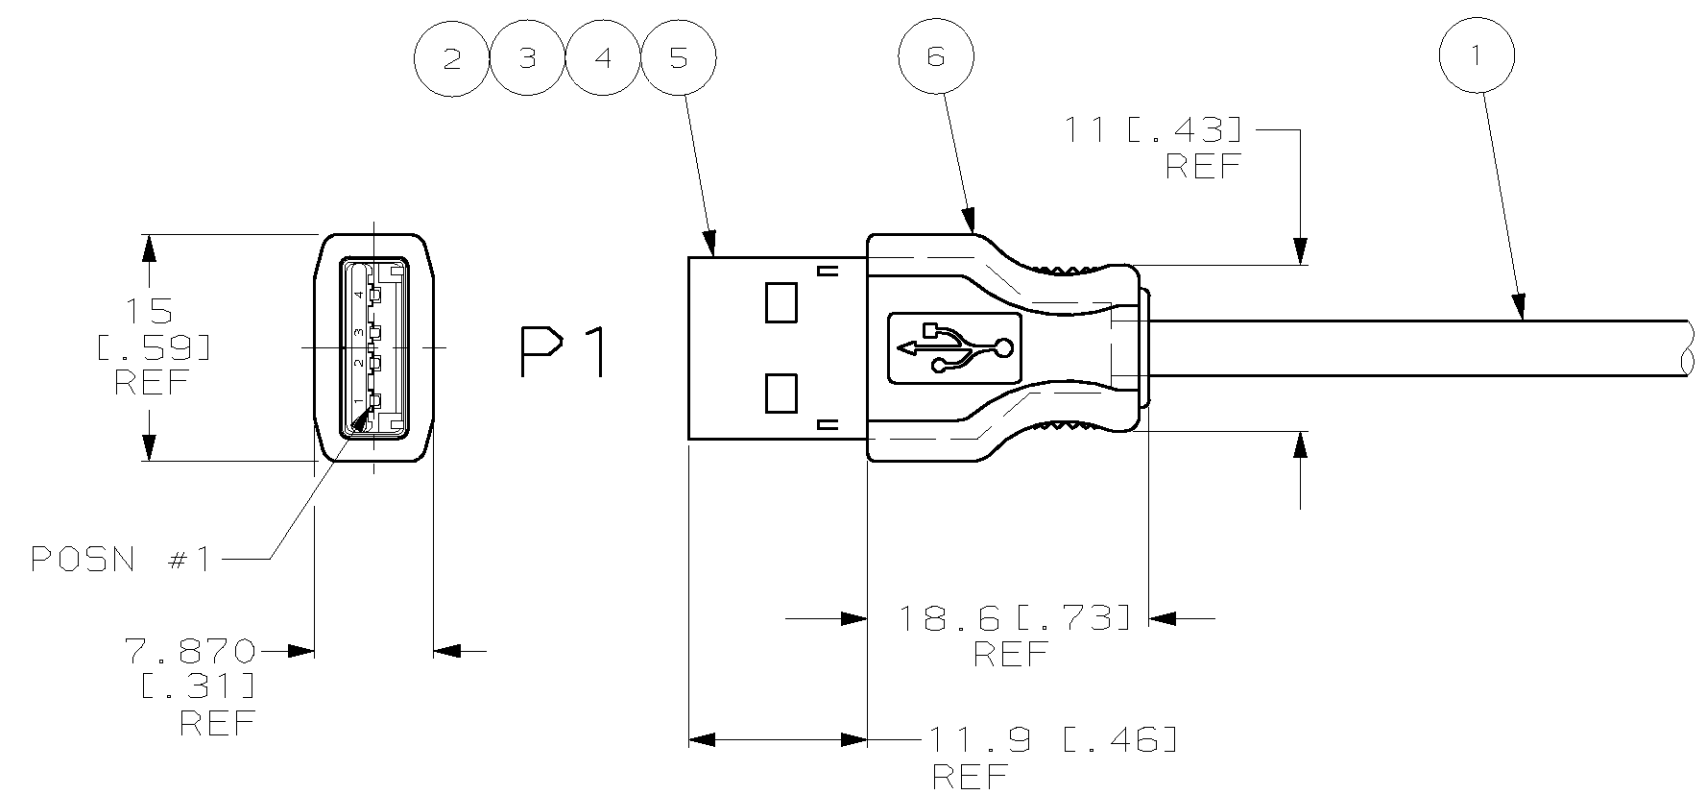

974540-2	1500 ⁺⁰ ₋₅₀
974540-1	2000 ⁺⁰ ₋₅₀
PART NUMBER	A

AR	AR	GR	OVERMOLD, PVC, WHITE	6
AR	AR	GR	FLUX, KESTER 951	5
AR	AR	GR	SOLDER, FLUX CORE	4
1	1	PC	PLUG SHELL, USB, TYPE A	3
1	1	PC	HOUSING, PLUG, TYPE A, USB	2
AR	AR	mm	CABLE	1
-2	-1	U/M	DESCRIPTION	ITEM NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN <i>K. Beaver</i> 3-12-98	AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK K. BEAVER 5/6/98	NAME USB CONSORTIUM, 4 POS, PLUG, TYPE A, 28/24 AWG	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		APVD K. BEAVER 5/6/98	PRODUCT SPEC 108-1586	
MATERIAL	FINISH	WEIGHT	SIZE A2	CAGE CODE 00779
- 1	- 2	-	DRAWING NO C-974540	RESTRICTED TO -
CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 1