






ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 \* Effective: 7/8/02 \* DCP No: 1398

| DCP # | REV | DESCRIPTION | DRAWN | DATE     | CHECKD | DATE     | APPRVD | DATE     |
|-------|-----|-------------|-------|----------|--------|----------|--------|----------|
| 1876  | A   | RELEASED    | EO    | 03/21/06 | TL     | 05/15/06 | HO     | 05/15/06 |

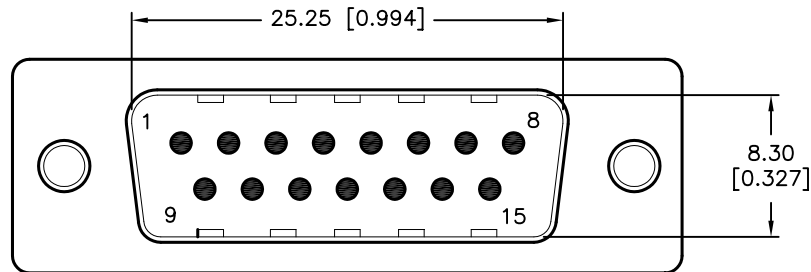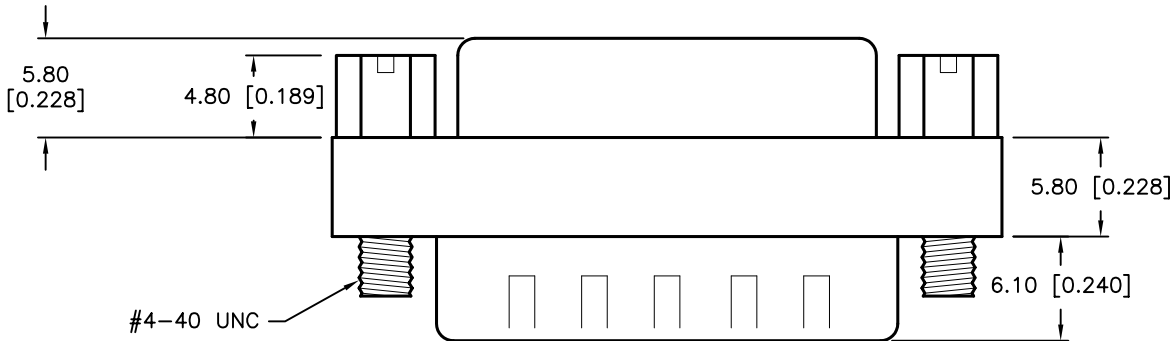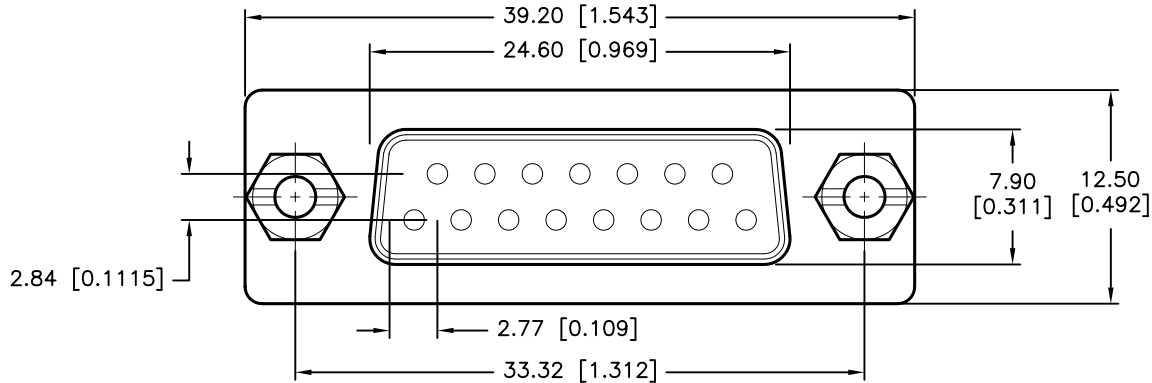

**Specification:**

- 1- Shell: Steel, Tin Plated
- 2- Contact: Gold Plated Over Nickel
- 3- Insulator: PBT Glass Fibre Reinforced UL94V-0
- 4- Current Rating: 3 AMP
- 5- Dielectric Strength: 1000V for One Minute
- 6- Insulator Resistance: 1000MegOhm Min at 500V DC
- 7- Temperature: -55°C ~ +105°C

DISCLAIMER:  
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

Unless Otherwise Specified

.X ±0.2 [0.008]

.XX ±0.12 [0.005]

|              |          |
|--------------|----------|
| DRAWN BY:    | DATE:    |
| EKLAS ODISH  | 03/21/06 |
| CHECKED BY:  | DATE:    |
| THOMAS LEE   | 05/15/06 |
| APPROVED BY: | DATE:    |
| HISHAM ODISH | 05/15/06 |

DRAWING TITLE:  
**DB15 M/F D-SUB MINI GENDER CHANGER, RoHS**

|      |          |                 |     |
|------|----------|-----------------|-----|
| SIZE | DWG. NO. | ELECTRONIC FILE | REV |
| A    | SPC15359 | 79K4948.DWG     | A   |

SCALE: NTS      U.O.M.: mm [INCHES]      SHEET: 1 OF 1