MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FED. MFR. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
DTE6-2RQ9

DTE6-2RQ9 | DRAWING NUMBER M | RELEASE NO. SR 11036 | REPLACES

ISSUE			
X	X	X	11
X	X	X	BP

14FEB06 CHECK

REVISIONS

A	SR 11036	M B F 29 MAY 63	29 MAY 63
B	CO 20728	M B F 18 NOV 65	
C	C026581	OMW 6 NOV 69	
D	CO 53191-D	KJS 1 MAR 84	
E	C055989	CJH 8 NOV 84	
F	C054958	TSK 26 FEB 85	29 MAY 63
G	C072661	D A W 8 SEP 92	
H	CO-77486C	S A D 20 JUL 94	DAW
J	0016894	KRB 10 NOV 05	
K	0018962	VKR 14FEB06	

DRAWN MBF 29 MAY 63 CHECK

FO-60378-003

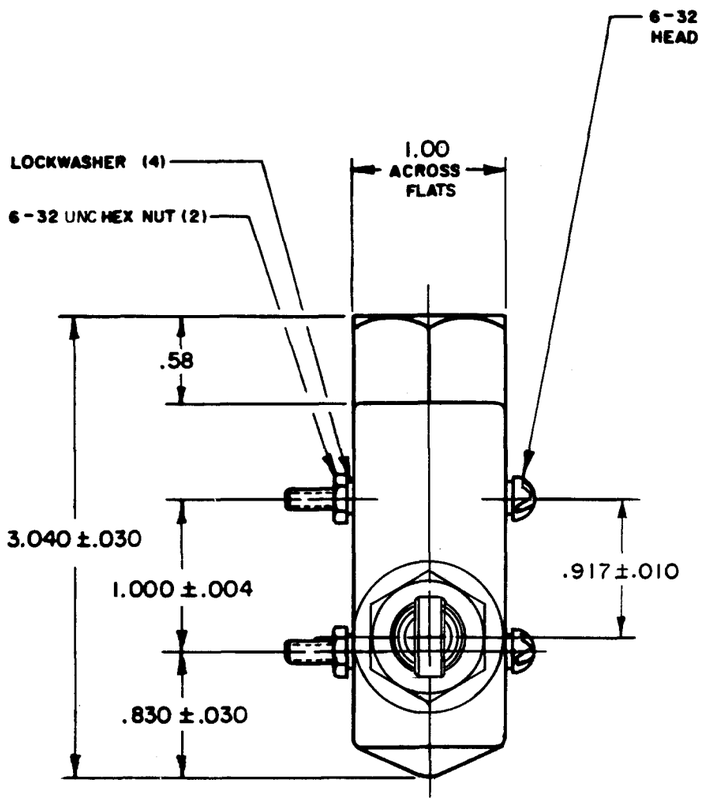

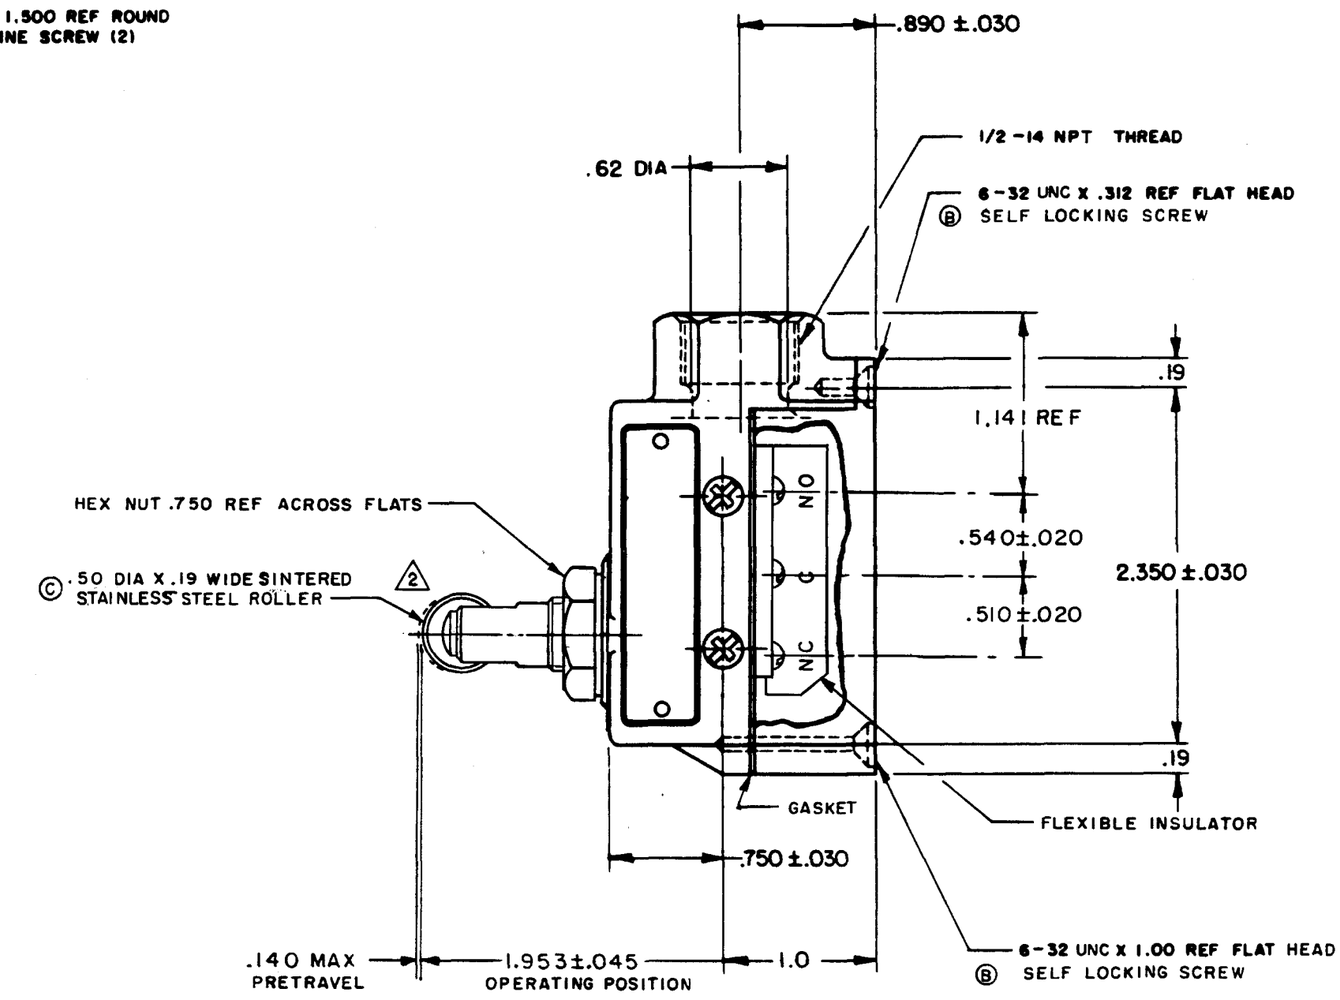

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — 1 1/2 — 3 LB

RELEASE FORCE — — — — 8 OZ MIN

Ⓑ DIFFERENTIAL TRAVEL — — — .060 MAX

OVERTRAVEL — — — — — .125 MIN

SWITCH — BASIC REPLACEMENT — DT-2R3-A7

ELECTRICAL DATA

CONTACT ARRANGEMENT
D P D T

-L59- 10 A-125 OR 250 VAC
0.3 A-125 VDC ; 0.15 A-250 VDC

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .56 LB

Ⓒ NOTE —

Ⓑ 1 — 4-40 UNC X.125 REF TERMINAL SCREW AND LOCKWASHER (6)

2 ROLLER MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER

3 - SEAL RATING: NEMA 1
IP40