

Hollow Wall Anchor: Anchor for hollow base materials



Features

- 5 Expansion legs give full support
- Demountable screw
- Expanded by special tool or screwdriver
- Very long threaded part
- Impossible unhooking of the screw
- Thick sheet for better tightening


Applications

- Fixing to plasterboard and hollow materials
- Bathroom accessories
- Pipework
- Trunking

Indicative tensile loads per material

| | | | |
|--------------|--------------|-------------|--------------|
| Hollow Block | Hollow Brick | Hollow Slab | Plasterboard |
| 30kg | 25kg | 18kg | 7kg |

Installation Details

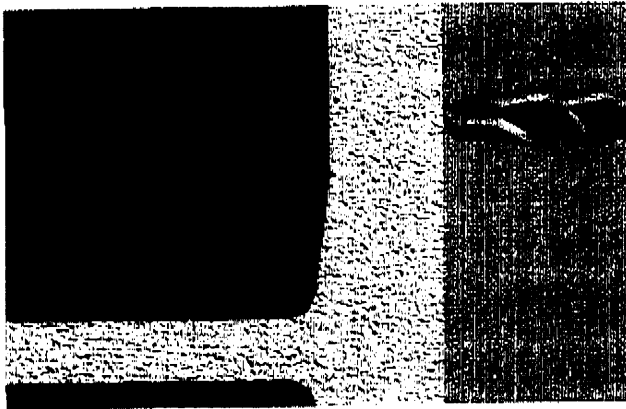

1. Drill the recommended sized hole thru the anchor into the hole until it is flush
2. Attach anchor setting tool to screw a Small sizes may be set using a screw
3. Remove the screw and place through then back into the hollow wall anchor

Restart animation:

Paslode ***DUO-FAST*** — **ITW** **Hanset** **BI**





WALL ANCHOR (ZINC PLATED AND CLEAR PASSIVATED)

| CODE | SCREW SIZE MM | WALL THICKNESS MM | MAX FIXTURE THICKNESS MM | HOLE DIAM MM | REC. TENSILE LOAD KN | REC. SHEAR LOAD KN | QTY PER BOX | PRICE £ PER 100 |
|------|------------------|----------------------|-----------------------------|-----------------|----------------------|--------------------|-------------|-----------------|
| 6715 | M4x25 | 0-5 | 8 | 8 | - | - | 100 | 24.30 |
| 6720 | M4x45 | 8-16 | 16 | 8 | 0.10 | 0.14 | 100 | 26.78 |
| 6725 | M4x50 | 16-23 | 17 | 8 | 0.10 | 0.14 | 100 | 29.26 |
| 6729 | M5x45 | 8-13 | 17 | 10 | 0.18 | 0.23 | 100 | 33.68 |
| 6730 | M5x60 | 8-16 | 26 | 10 | 0.18 | 0.23 | 100 | 35.08 |
| 6735 | M5x70 | 16-32 | 26 | 10 | 0.18 | 0.23 | 100 | 40.58 |
| 6740 | M6x60 | 7-16 | 30 | 13 | 0.29 | 0.34 | 100 | 44.50 |
| 6745 | M6x70 | 16-32 | 26 | 13 | 0.29 | 0.34 | 100 | 48.44 |

Rec. loads based on 12mm plasterboard.