

# CORDS & ELECTRICAL


## 3 CONDUCTOR CORDAGE

### PVC AND RUBBER

TYPES SJT, SVT, SJ, SV

## CORDAGE APPLICATIONS:

- Motor Controls
- In-Plant Power Distribution

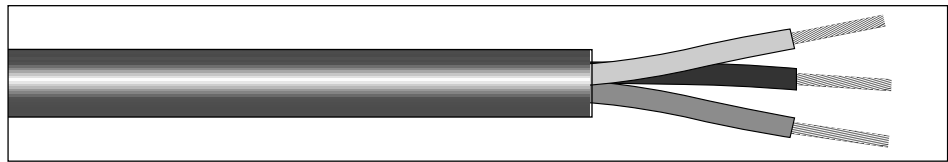

## CHARACTERISTICS

### OPERATING TEMPERATURE:

- -20°C to 60°C

### VOLTAGE RATING:

- 300 Volt

### COLOR DESCRIPTION:

- Color Code: Black, White, Green
- Jacket Color: Black, Gray
- \* Available in Black Jacket Only

### PRODUCT DESCRIPTION:

- Conductor: Stranded Bare Copper
- Insulation: Color-Coded PVC or Rubber
- Jacket: PVC or Rubber

## SPECIFICATIONS

- UL Standard 62
- CSA Standard C22.2 No. 49

† Not CSA Certified



Canadian Standards Association

## AVAILABILITY

- 100 ft (30,5m) and 250 ft (76,2m) put-ups
- ▲ Gray available in 250 ft (76,2m) only

### TYPE SJT 3 CONDUCTOR - PVC JACKET

Alpha Part No.	AWG	Conductor			Insulation Thickness		Jacket Thickness		Diameter	
		mm <sup>2</sup>	Strand	mm	In.	mm	In.	mm	In.	mm
1952/3T	18	0,82	41/34	41 x 0,16	0,030	0,76	0,030	0,76	0,33	8,4
▲1953/3T	16	1,31	65/34	65 x 0,16	0,030	0,76	0,030	0,76	0,35	8,9

### TYPE SVT 3 CONDUCTOR - PVC JACKET

Alpha Part No.	AWG	Conductor			Insulation Thickness		Jacket Thickness		Diameter	
		mm <sup>2</sup>	Strand	mm	In.	mm	In.	mm	In.	mm
1951/3T†	18	0,82	41/34	41 x 0,16	0,015	0,38	0,030	0,76	0,25	6,4

### TYPE SJ 3 CONDUCTOR - RUBBER JACKET

Alpha Part No.	AWG	Conductor			Insulation Thickness		Jacket Thickness		Diameter	
		mm <sup>2</sup>	Strand	mm	In.	mm	In.	mm	In.	mm
1952/3*	18	0,81	16/30	16 x 0,25	0,030	0,76	0,030	0,76	0,33	8,4
1953/3*	16	1,32	26/30	26 x 0,25	0,030	0,76	0,030	0,76	0,35	8,9

### TYPE SV 3 CONDUCTOR - RUBBER JACKET

Alpha Part No.	AWG	Conductor			Insulation Thickness		Jacket Thickness		Diameter	
		mm <sup>2</sup>	Strand	mm	In.	mm	In.	mm	In.	mm
1951/3*	18	0,82	41/34	41 x 0,16	0,015	0,38	0,030	0,76	0,26	6,6