


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC AF	DIST 50	P	F	REVISIONS			DATE	APPD
				ZONE	LTR	DESCRIPTION		
					L	REV PER 0G1A-0147-99	3JUN99	JR/JH

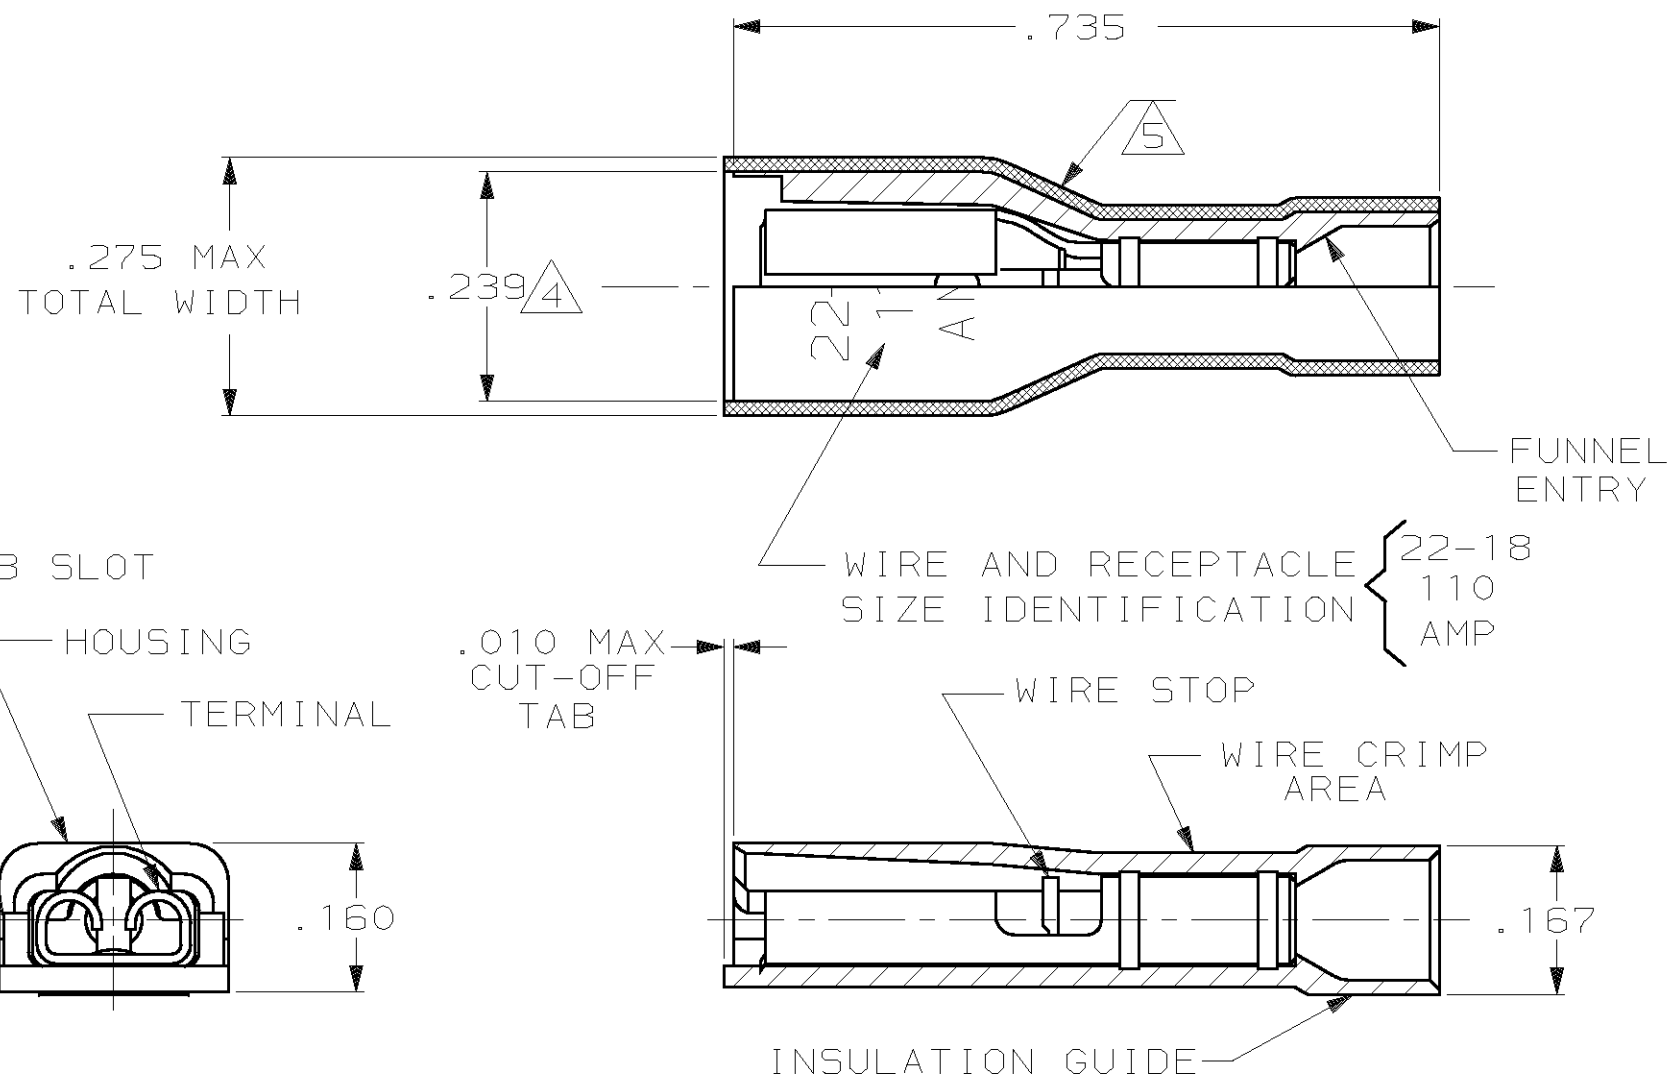

- 1 MATES WITH .032±.001X.110 OR .125 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .120 MAX DIA
- 4 DIMENSION DOES NOT INCLUDE TRIM BURR
- 5 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

HOUSING: NYLON, COLOR-RED TRANSLUCENT		RECEPTACLE: #3 HARD BRASS		TIN PL .000080 MIN THK		2-520273-2	
MATERIAL & FINISH						PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON:		DR 11/9/88 P FORTNEY		CHK 11/9/88 MS FEHER		AMP INCORPORATED Harrisburg, Pa. 17105	
2 PLC DEC ± -		APPD 11/11/88 K RANDOLPH		APPD 11/11/88 TL SHUTTER		RECEPTACLE ASSY, ULTRA-FAST, LOOSE PIECE, .110/.125 SERIES, 22-18 AWG	
MATERIAL SEE TABLE		PRODUCT SPEC 108-2043		FINISH SEE TABLE		APPLICATION SPEC 114-2035	
		WEIGHT -		SIZE B		FSCM NO 00779	
				DRAWING NO 520273		SCALE 5:1	
				SHEET 1 OF 1			