



Buzzer Element 645.800

WERMA Signaltechnik
GmbH + Co.
Dürbheimer Straße 15
D-78604 Rietheim-Weilheim
Phone 0049/7424/9557-0
Fax 0049/7424/9557-44

(provisional technical data sheet)

Electrical specifications:

Operating voltage: $U = 24V/115V/230V$
Current consumption: $I_{eff} = \leq 25mA$
Audio frequency: ca. 1750 Hz
(impulse tone pulsating with 1Hz)
Duty cycle: 100 %
Working life: >5000 h

Order number:

645 800 75 24 V (12-30V) AC/DC
645 800 77 115 V (70-150V) AC/DC
645 800 68 230 V (110-240V) AC

(other voltages on request)

Further specifications:


Housing material: ABS/PC, black
Mass: ca. 75g
Temperature: $-20^{\circ}C \dots +50^{\circ}C$
Loudness: 85 dB(A)/1m
Protection rating: IP65

Regulations: Conform to current
EC-regulations.
UL-listed.

Features:

*without sound output holes
*pulsating and permanent tone adjustable
by a switch

All specifications refer to Unenn and room temperature!

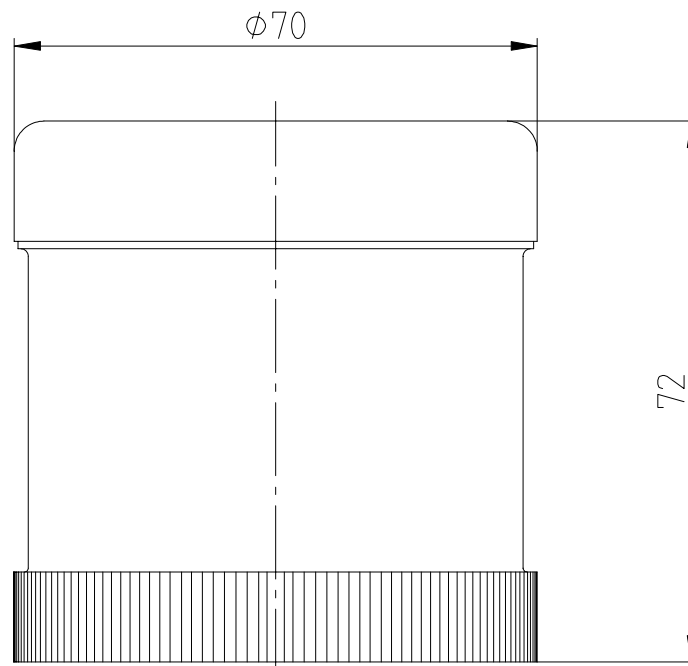

	Drawn up	proved	released	Data-sheet-No.
Name	E. Rudischhauser	S. Neumann	H. Elsäßer	000 645 501
Date	2001-11-06	2001-11-06	2001-11-09	Page 1 of 1