




Designers' Choice

# 2AG & 5mm FUSE CLIPS

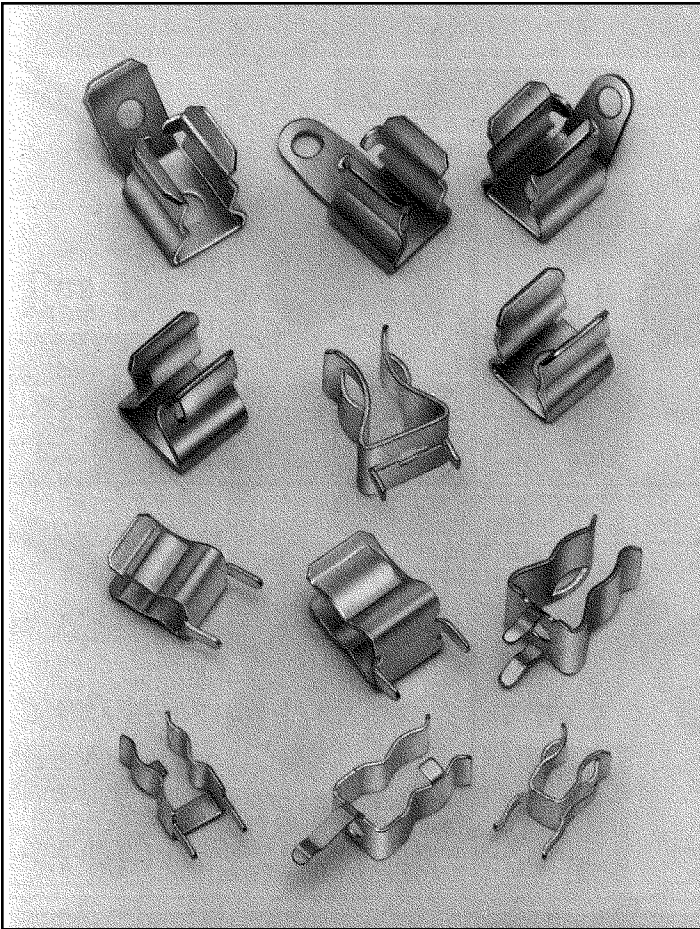

- PC thru mount and rivet types for 2AG, 5mm, 3AG, 9/32 & 13/32 fuse sizes
- Low contact resistance
- Withstands shock and vibration
- Rated 6.3 to 30 Amps
- Custom designs and modifications available to your specifications


### PC THRU MOUNT TYPES

- Available for 2AG, 5mm, 3AG & 13/32 sizes
- Low profile, space saving
- Snap-fit design enhances assembly and PC retention for wave soldering
- Available with orientation legs to assure proper PC installation
- Available with or without end stops

### RIVET TYPES


- Available for 3AG & 9/32 sizes
- Available with straight or 45° solder lugs
- Available with .187, .205 or .250 or quick fit tabs
- Low profile, space saving
- Available with or without end stops

## 5mm/3AG PC MULTI-FUSE CLIP

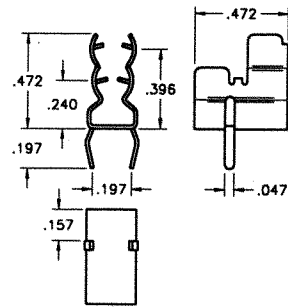


.016 Phosphor Bronze, Tin Plate  
Current Rating: 15 Amps

Mounting Detail



CAT. NO. 3562


## 5mm PC CLIP



3517 3518P

.020 Brass, Tin Plate  
Current Rating: 15 Amps


CAT. NO.	"A"	"B"
3517	.060	.060
3518P	.060	.093



With or Without Orientation Legs

CAT. NO. 3520

## 2AG/5mm THM/SMT FUSE CLIP




3521 3561


.016 Brass, Tin Plate  
Current Rating: 10 Amps

CAT. NO. 3521 (THM with PC legs)

CAT. NO. 3561 (SMT with Hole)




Mounting Detail  
Cat. No. 3521 Only



## 5mm PC CLIP




.016 Brass, Tin Plate  
Current Rating: 6.3 Amps




CAT. NO. 3520


## 5mm PC CLIP



.016 Brass, Tin Plate  
Current Rating: 10 Amps



Mounting Detail



CAT. NO. 3519