




# SPECIFICATION CONTROL DRAWING Crystal Resonator

FREQUENCY
32.000000MHz

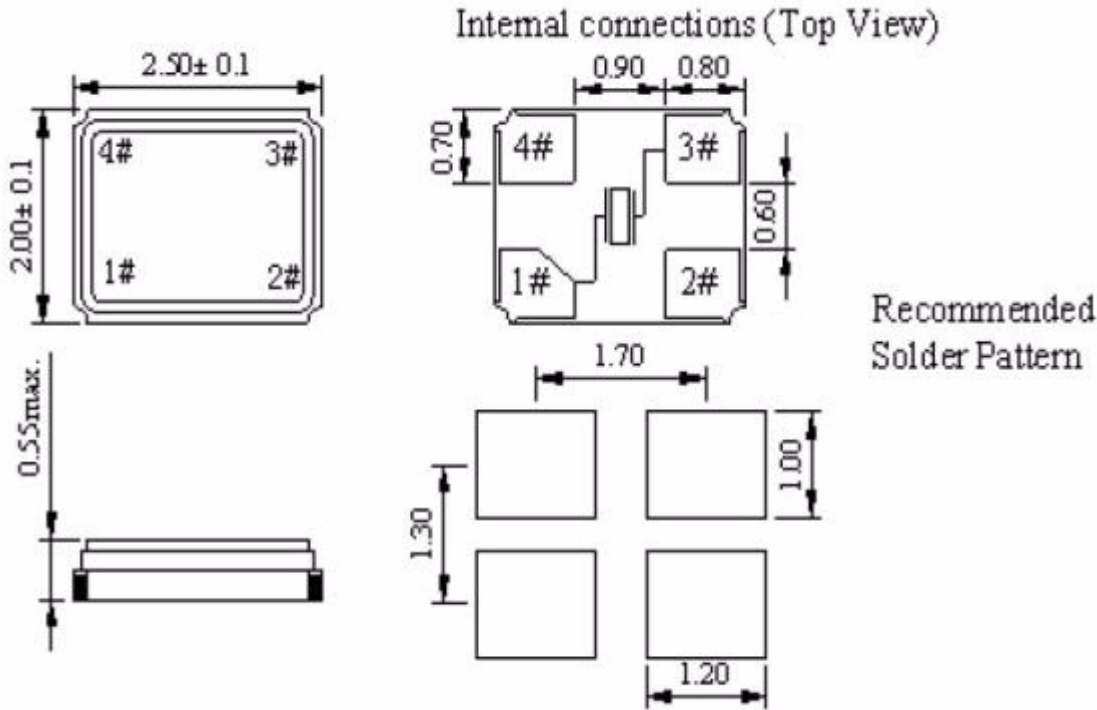

<p>Holder Style Mode Adjustment Tolerance Temperature Stability Operating Temp. Range Load Capacitance ESR Ageing Marking</p>	<p>25x2x05 4-pad Fundamental <math>\pm 10</math>PPM at 25°C <math>\pm 15</math> PPM -30°C to +85°C 16 pF 100 Ohm +/-2ppm 1st Year Max AEL32</p>
---	---

Amdt Date	Change Note	AEL Code		
25 MAR 08	Temp Stability, Temp Range and ESR corrected	<b>X32M000000S027</b>		
		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="text-align: left; padding: 5px;">Issue Ref</th> <td style="text-align: center; padding: 5px;">B</td> </tr> </table>	Issue Ref	B
Issue Ref	B			