



### A Power Relay with Various Models

- High-sensitivity (250 mW) and High-capacity (16 A) Models available.
- Low profile: 15.7 mm max. in height
- Conforms to VDE (EN61810-1), UL508 and CSA22.2.
- Meets EN60335-1 requirements for household products.
- Clearance and creepage distance: 10 mm/10 mm.
- Tracking resistance: CTI>250
- Coil Insulation system: Class F (UL1446)

RoHS Compliant



### Contact Data

	Standard models		High-capacity models	High-sensitivity models
Number of poles	1 pole	2 pole	1 pole	1 pole
Contact materials	AgSnO <sub>2</sub> (Cd free)			
Contact resistance	100 mΩ max.			
Rated load	12 A at 250 VAC 12 A at 24 VDC (See note.)	8 A at 250 VAC 8 A at 30 VDC (See Note.)	16 A at 250 VAC 16 A at 30 VDC (See note.)	10 A at 250 VAC 10 A at 24 VDC (See note.)
Rated carry current	12 A (See note.)	8 A (70°C)/5 A (85°C) (See note.)	16 A (See note.)	10 A (See note.)
Max. switching voltage	440 VAC, 300 VDC			
Max. switching current	12 A	8 A	16 A	10 A
Max. switching power	3,000 VA	2,000 VA	4,000 VA	2,500 VA
Mechanical endurance	20,000,000 operations (at 18,000 operations/hr)			
Max operating frequency	Mechanical: 18,000 operation/hr Electrical: 1,800 operation/hr at rated load			
Electrical endurance data	C.O.:12 A at 250 VAC (cosφ=1) 50,000 operations min. 12 A at 24 VDC 30,000 operations min. N.O. only:5 A at 250 VAC (cosφ=0.4) 150,000 operations min. 5 A at 30 VDC (L/R=7 ms) 20,000 operations min.	C.O.:8 A at 250 VAC (cosφ=1) 30,000 operations min. 8 A at 30 VDC 30,000 operations min.	C.O.:16 A at 250 VAC (cosφ=1) 30,000 operations min. 16 A at 24 VDC 30,000 operations min. N.O. only:8 A at 250 VAC (cosφ=0.4) 200,000 operations min. 8 A at 30 VDC (L/R=7 ms) 10,000 operations min. Pilot duty (A300), 250 VAC 250,000 operations min. Pilot duty (A300), 125 VAC 150,000 operations min. 16 A at 250 VAC (cosφ=1) at 105°C 100,000 operations min. by -CV type.	C.O.:10 A at 250 VAC (cosφ=1) 100,000 operations min. 10 A at 24 VDC 50,000 operations min.
Contact rating (Approved Standards)	UL508 (File No. E41643)/CSA C 22.2(No. 14) (File No. LR31928)			
	12 A at 250 VAC (General use) 12 A at 24 VDC (Resistive)	8 A at 277 VAC (General use) 8 A at 30 VDC (Resistive)	16 A at 250 VAC (General use) 16 A at 24 VDC (Resistive)	10 A at 250 VAC (General use) 10 A at 24 VDC (Resistive)
	VDE (EN61810-1) (License No. 119650)			
	12 A at 250 VAC (cosφ=1) 12 A at 24 VDC (L/R=0 ms) AC15: 3 A at 240 VAC DC13: 2.5 A at 24 VDC, 50 ms	8 A at 250 VAC (cosφ=1) 8 A at 24 VDC (L/R=0 ms) AC15: 1.5 A at 240 VAC DC13: 2 A at 30 VDC, 50 ms	16 A at 250 VAC (cosφ=1) 16 A at 24 VDC (L/R=0 ms) AC15: 3 A at 240 VAC(NO), 1.5 A at 240 VAC (NC) DC13:2.5 A at 24 VDC(NO), 50 ms 16 A at 250 VAC (cosφ=1) at 105°C -CV type	10 A at 250 VAC (cosφ=1) 10 A at 24 VDC (L/R=0 ms)

Note: Contact your OMRON representative for the ratings on fully sealed models.


Values in the above table are the initial values.

Electrical endurance will vary depending on the test conditions. Contact your OMRON representative if you require more detailed information for the electrical endurance under your test conditions.


### Maximum Switching Capacity

#### Standard models

G2RL-1A, G2RL-1




G2RL-2A, G2RL-2




#### High-capacity models

G2RL-1A-E, G2RL-1-E



#### High-sensitivity models

G2RL-1A-H, G2RL-1-H




## Coil Rating


	Standard models				High-capacity models				High-sensitivity models		
	5 VDC	12 VDC	24 VDC	48 VDC	5 VDC	12 VDC	24 VDC	48 VDC	5 VDC	12 VDC	24 VDC
Rated voltage	5 VDC	12 VDC	24 VDC	48 VDC	5 VDC	12 VDC	24 VDC	48 VDC	5 VDC	12 VDC	24 VDC
Rated current	80.0 mA	33.3 mA	16.7 mA	8.96 mA	80.0 mA	33.3 mA	16.7 mA	8.96 mA	50.0 mA	20.8 mA	10.42 mA
Coil resistance	62.5Ω	360Ω	1,440Ω	5,358Ω	62.5Ω	360Ω	1,440Ω	5,358Ω	100Ω	576Ω	2,304Ω
Must operate voltage	70% max. of the rated voltage								75% max. of the rated voltage		
Must release voltage	10% min. of the rated voltage										
Max. voltage	180% of rated voltage (at 23°C)										
Power consumption	Approx. 400 mW				Approx. 430 mW	Approx. 400 mW			Approx. 430 mW	Approx. 250 mW	
Coil insulation system according to UL	Class F										

Note: The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

### Ambient Temperature vs Rated Carry Current



### Ambient Temperature vs Maximum Coil Voltage



Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

## Insulation

	Standard models		High-capacity models	High-sensitivity models
	1 pole	2 pole	1 pole	1 pole
Dielectric strength	5,000 VAC, 1 min between coil and contacts 1,000 VAC, 1 min between contacts of same polarity	5,000 VAC, 1 min between coil and contacts 2,500 VAC, 1 min between contacts of different polarity 1,000 VAC, 1 min between contacts of same polarity	5,000 VAC, 1 min between coil and contacts 1,000 VAC, 1 min between contacts of same polarity	5,000 VAC, 1 min between coil and contacts 1,000 VAC, 1 min between contacts of same polarity
Impulse withstand voltage	10 kV(1.2X50μs) between coil and contact			
Insulation resistance	1,000 MΩ min. (at 500 VDC)			
Creepage distance	10 mm MIN.			
Clearance distance	10 mm MIN.			
Insulation material group	IIIa			
Insulation to IEC 60664-1				
Type of insulation coil-contact circuit	Reinforced			
Type of insulation open contact circuit	Functional			
Rated insulation voltage	250 V			
Pollution degree	3 (Flux protection), 2(Fully sealed)			3
Rated voltage system	250 V (Flux protection), 400 V (Fully sealed)			250 V
Over voltage category	III			

Note: Values in the above table are the initial values.

## Other Data

	Standard/High-capacity/High-sensitivity models
RoHs directive 2002/95/EC	Compliant
Flammability class according to UL94	V-0
Operate(set) time	15 ms max.
Release(reset) time	5 ms max.
Vibration resistance	Destruction: 10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude) Malfunction: 10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude)
Shock resistance	Destruction: 1,000 m/s <sup>2</sup> (approx. 100G) Malfunction: 100 m/s <sup>2</sup> (approx. 10G)
Ambient temperature	Operating: -40°C to 85°C (with no icing) Storage: -55°C to 85°C (with no icing)
Ambient humidity	Operating: 5% to 85%
Category of protection (IEC 61810)	RT II(Flux protection), RT III(Fully sealed)
Weight	Approx. 12g


Note: Values in the above table are the initial values.

# Dimensions


Note: All units are in millimeters unless otherwise indicated.

## Standard models/High-sensitivity models


### G2RL-1A(-H), G2RL-1A4

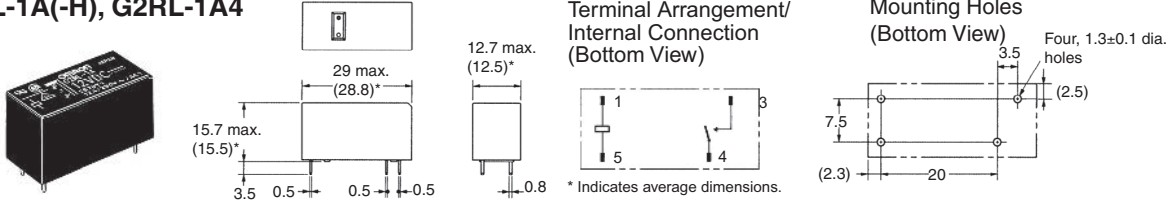


### G2RL-1(-H), G2RL-14

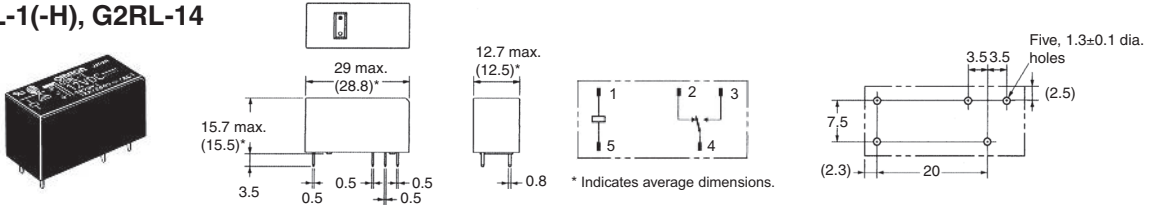

### G2RL-2A, G2RL-2A4

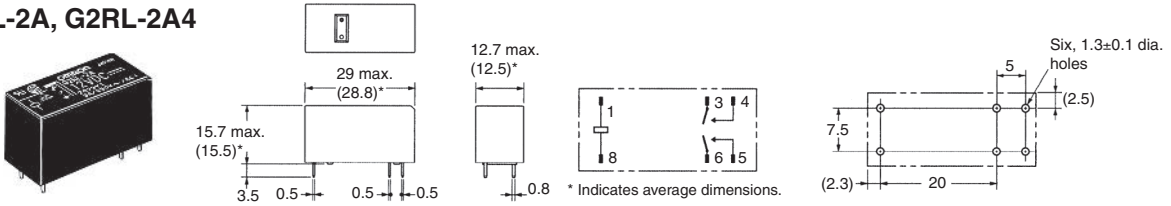


### G2RL-2, G2RL-24

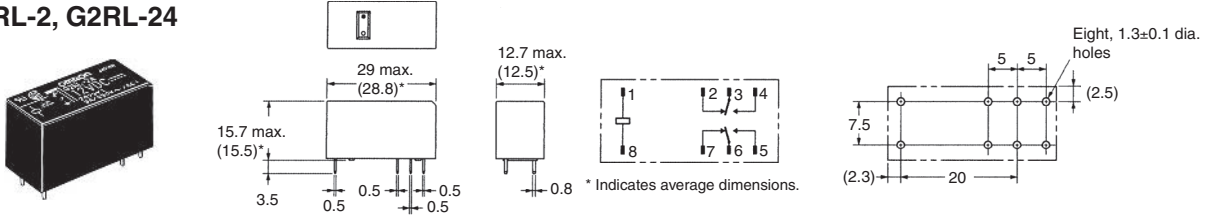


## High-capacity models


### G2RL-1A-E, G2RL-1A4-E

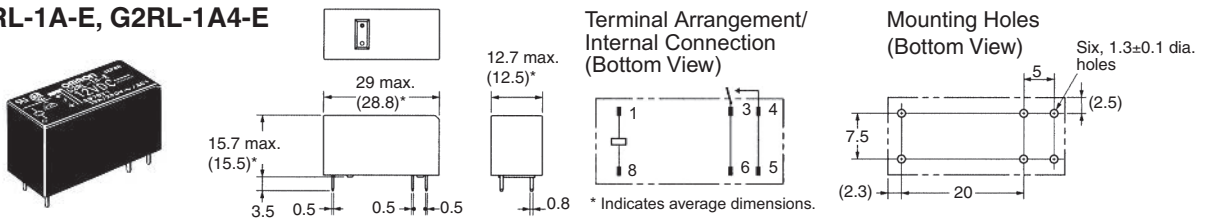

### G2RL-1-E, G2RL-14-E

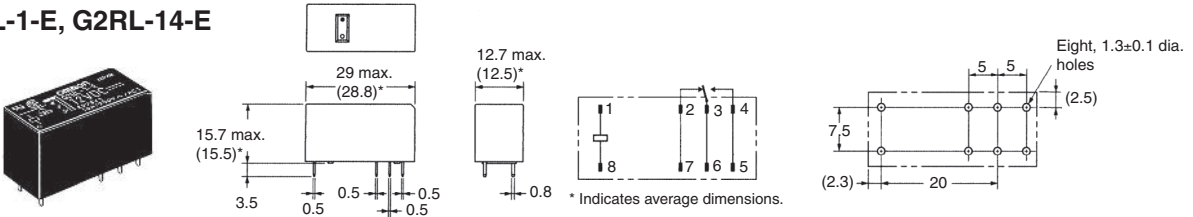

## Model Number Legend

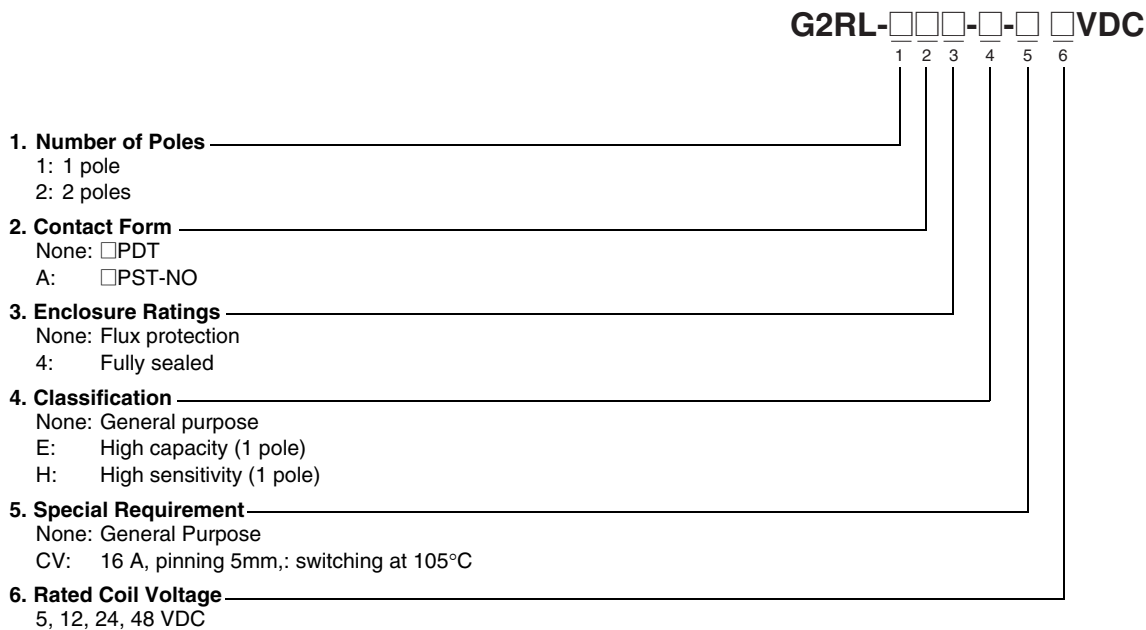

## Ordering Information

Enclosure ratings	Standard models				High-cap models		High-sensitivity models	
	SPST-NO	SPDT	DPST	DPDT	SPST-NO	SPDT	SPST-NO	SPDT
<b>Flux protection</b>	G2RL-1A	G2RL-1	G2RL-2A	G2RL-2	G2RL-1A-E-(CV)	G2RL-1-E	G2RL-1A-H	G2RL-1-H
<b>Fully sealed</b>	G2RL-1A4	G2RL-14	G2RL-2A4	G2RL-24	G2RL-1A4-E	G2RL-14-E	---	---

**Note:** When ordering, add the rated coil voltage to the model number.

Example: G2RL-1A 12 VDC

         Rated coil voltage

## Precautions

### Disclaimer:

All technical performance data applies to the product as such; specific conditions of individual applications are not considered. Always check the suitability of the product for your intended purpose. OMRON does not assume any responsibility or liability for noncompliance herein, and we recommend prior technical clarification for applications where requirements, loading, or ambient conditions differ from those applying to general electric applications. Any responsibility for the application of the product remains with the customer alone. THIS COMPONENT CAN NOT BE USED FOR AUTOMOTIVE APPLICATIONS.