

**MICRO SWITCH**  
a Honeywell Division

FED. MFG. CODE 91 929

**SWITCH-BASIC**


CATALOG LISTING

**V7-2B17D8-048**

**CW-B3088**

CATALOG LISTING  
**V7-2B17D8-048**  
RELEASE NO. PR-19143  
REPLACES  
**M**  
ISSUE  
**3**

REVISIONS  
A CO 76214 G R T 20 OCT 93  
B 0085964 SBH 30 JAN 12  
CHECK 30 JAN 12  
CMH  
CHECK 26 JUN 91  
L A D  
CHECK 20 JUN 91  
DRAWN  
RASTER

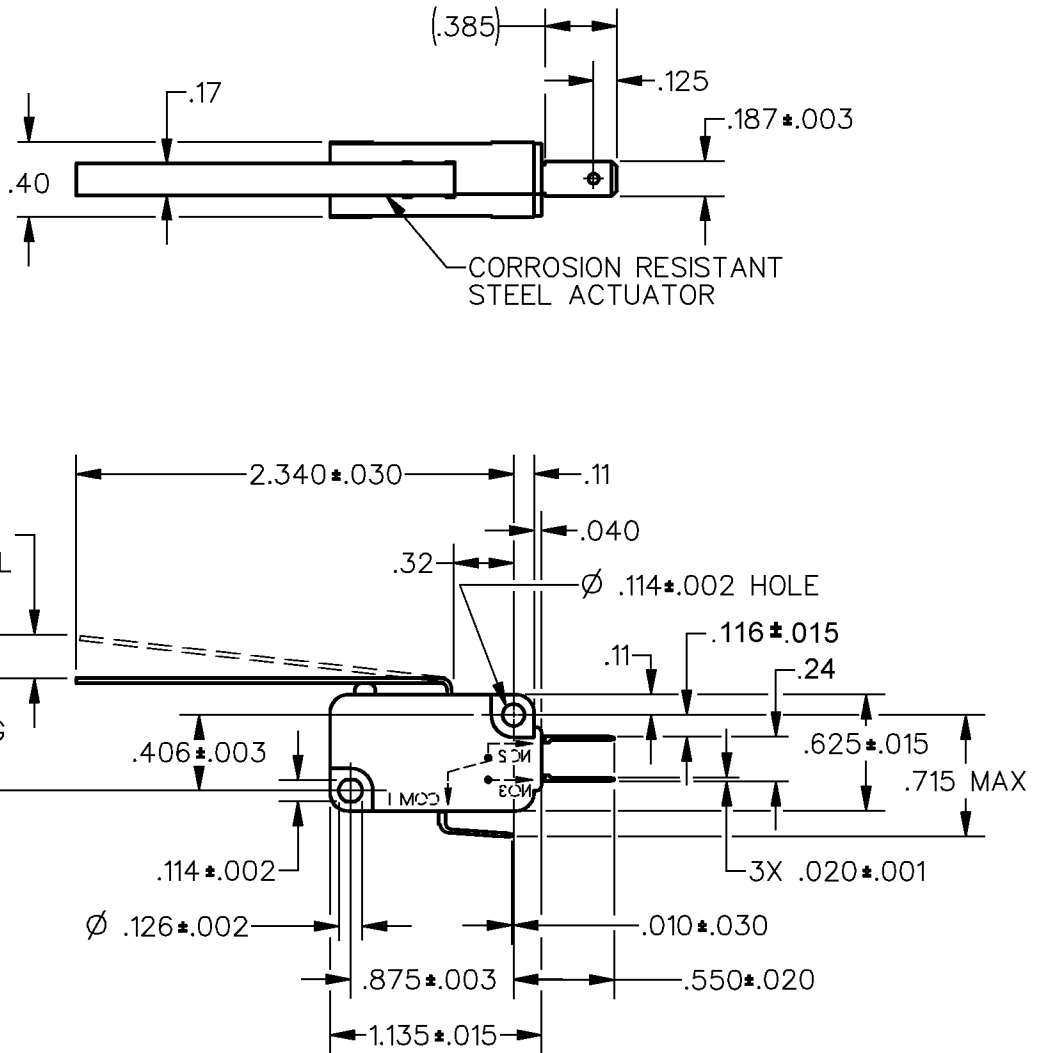


NOTE  
1 - CAUTION: OVERTRAVEL FORCE ON LEVER MUST NOT RESULT IN AN OVERTRAVEL FORCE ON PLUNGER EXCEEDING 5 LBS

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS
OPERATING FORCE --- 20 GRAMS MAX
RELEASE FORCE --- 1 GRAM MIN
DIFFERENTIAL TRAVEL --- .050 MAX
OVERTRAVEL --- .115 MIN
RELEASE TRAVEL --- .030 MIN

ELECTRICAL DATA
CONTACT ARRANGEMENT S P D T
L156 11A 1/3HP 125, 250 OR 277 VAC 1/2A 125 VDC, 1/4A 250 VDC 4A 125 VAC "L"

SCALE	NONE	DO NOT SCALE PRINT
<b>UNLESS OTHERWISE SPECIFIED TOLERANCES ARE</b>		
ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±
WEIGHT		

