
SPECIFICATION CONTROL DRAWING

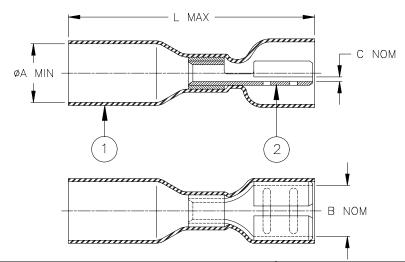

Product Name		Pro	duct Dimen	Wire Dimensions				
	øΑ	В	С	L	Color (1)	Size Range	øG	
	min	nom	nom	max	Coloi (1)	mm ² (AWG)	min	max
B-106-3631	4.00	6.60	0.80	30.00	Red	0.5 - 1.0	1.4	4.0
	[0.160]	[0.260]	[0.030]	[1.180]	Keu	(AWG 22-18)	[0.055]	[0.160]
B-106-3632	4.60	6.60	0.80	32.00	Blue	1.5 - 2.5	2.0	4.6
	[0.180]	[0.260]	[0.030]	[1.260]	Blue	(AWG 16-14)	[0.080]	[0.180]
B-106-3633	6.50	6.60	0.80	33.00	Yellow	3.0 - 6.0	2.8	6.5
	[0.255]	[0.260]	[0.030]	[1.300]	Tellow	(AWG 12-10)	[0.110]	[0.255]
B-106-3481	4.00	5.05	0.80	30.00	Red	0.5 - 1.0	1.4	4.0
	[0.160]	[0.199]	[0.030]	[1.180]	Keu	(AWG 22-18)	[0.055]	[0.160]
B-106-3281	4.00	2.80	0.50	22.50	Red	0.5 - 1.0	1.4	4.0
	[0.160]	[0.110]	[0.020]	[0.885]	Ked	(AWG 22-18)	[0.055]	[0.160]

MATERIALS

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent color (1), radiation cross-linked modified polyamide with thermoplastic adhesive coating inside.
- 2. PUSH-ON TERMINAL: Tin-plated brass.

BASE METAL: C260 Brass.

PLATING: Tin-plated per ASTM B545, Class A.

APPLICATION

- 1. These controlled crimp devices are designed to terminate a tin-plated or bare copper stranded wire having an insulation rated for at least 75°C to a push-on terminal. It will provide a splash proof and strain relief connection.

 UL listed wire connector 3Z11.
- 2. Temperature range: -55° C to $+125^{\circ}$ C.
- 3. For application tooling and installation, see RPIP-684-00.

For best results, prepare the wire as shown: 6.0 ± 0.5 (0.235 ± 0.020)

DuraSeal is a trademark of Tyco Electronics Corporation.

tyco Electronics		300 Const	ronics Corporation itution Drive, k, CA. 94025, U.S.A.	Raychem	TITLE: DUR	N		
Unless otherwise [Inches dimensio	ns are		ns are in millimeters. ckets] Tyco Electronics reserve	DOCUMENT NO.: B-106-3XXX				
0.00 N/A	ANC	JLES: N/A	this drawing at any time					
0.0 N/A		OUGHNESS IN evaluate the suit		of the product for their	REV.:	DATE:		
0 N/A MICRON		application.		A	17-Jul-06			
DRAWN BY:		CAGE CODE		DCR NUMBER:	SCALE:	SIZE:	SHEET:	
M. FORONDA	A	06090	D030510	D060178		A	1 of 1	