MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH–BASIC

CATALOG LISTING
V7–2B17D8–162
CW–B3072

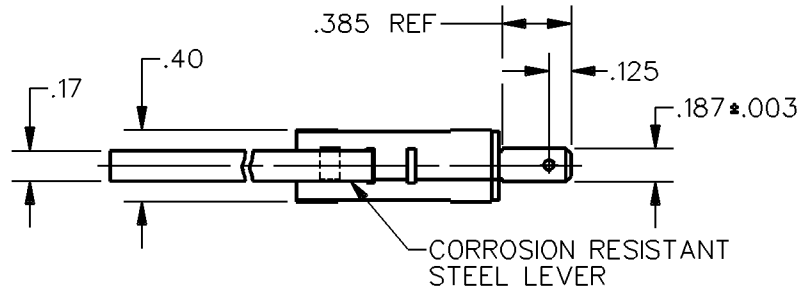

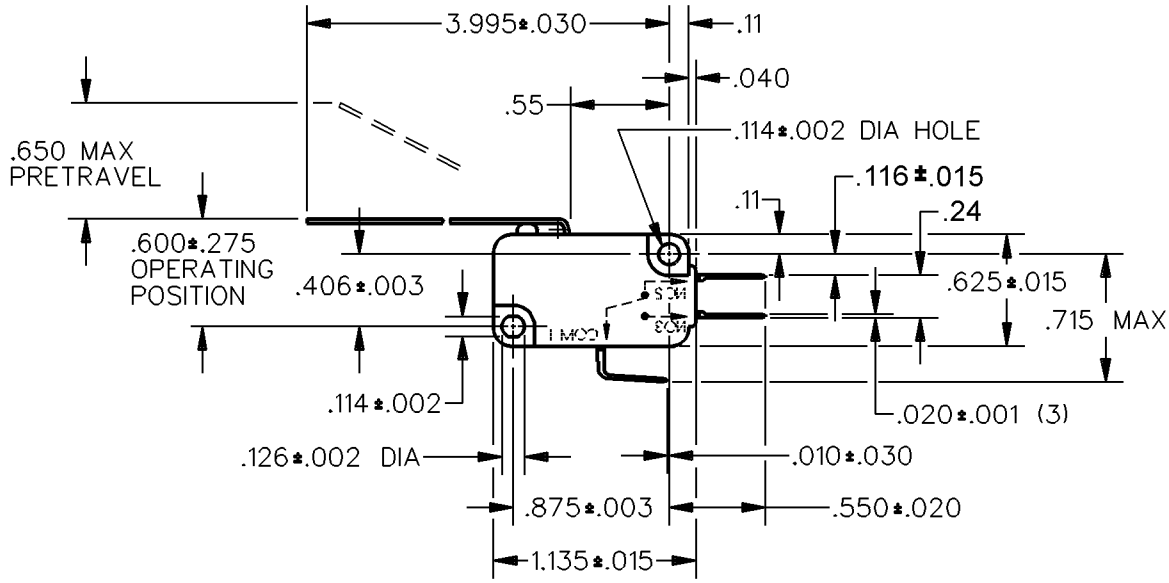

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	
OPERATING FORCE	10 GRAM MAX
RELEASE FORCE	1/2 GRAM MIN
DIFFERENTIAL TRAVEL	.170 MAX
OVERTRAVEL	.380 MIN
RELEASE TRAVEL	.087 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L156
11A 1/3HP 125, 250, 277 VAC
1/2A 125 VDC; 1/4A 250 VDC
4A 125 VAC "L"

SCALE NONE — DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

CATALOG LISTING V7–2B17D8–162
RELEASE NO. PR–17783 REPLACES
ISSUE 3

REVISIONS
A CO 76214 GRT 20 OCT 93
B 0085964 SBH 30JAN12

DRAWN	WJM	1 DEC 89
CHECK	DCS	8 DEC 89
CHECK	CMH	30JAN12
CHECK		
CHECK		

RASTER