


SRL LOCKSWITCH


LORLIN

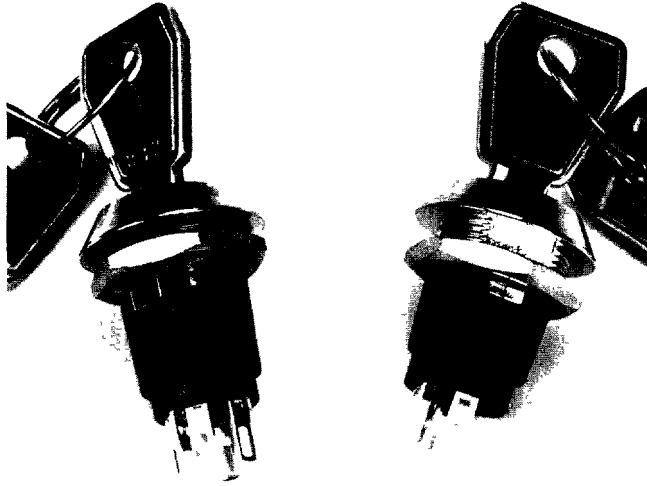

- Made in UK
- Miniature key-operated lockswitch.
- Single or double pole.
- Up to 200 key combinations - keys to differ
- Common keys available - keys to pass.
- Keys are double entry - they can be inserted into the lock either way up.
- Occupies a small panel area.
- Easily assembled through front of equipment panel.
- Rear projection less than 30mm from panel.

ELECTRICAL AND MECHANICAL SPECIFICATION

Proof Voltage	750 V dc minimum
Current Carrying Capacity (Non-Switching)	5A
Contact Rating (Switching Resistive Load)	5A 115Vac 3A 50V dc
Insulation Resistance	100 Megohm minimum
Initial Contact Resistance	20 Milliohm maximum
Minimum Operating Life	10000 Cycles
Contact Material	Silver Plated Brass
Body Material	Glass Filled Polyester
Operating Temperature	-20°C to 65°C
Standard number of keys per lock	2



ORDERING CODES

SRL - 5


Style (A to M) _____
See rear of data sheet.

Keys _____
S = common to all locks D = keys to differ between locks

Number of keys per lock _____

Single Pole Lockswitch


Parallel Lock Head
90° Indexing

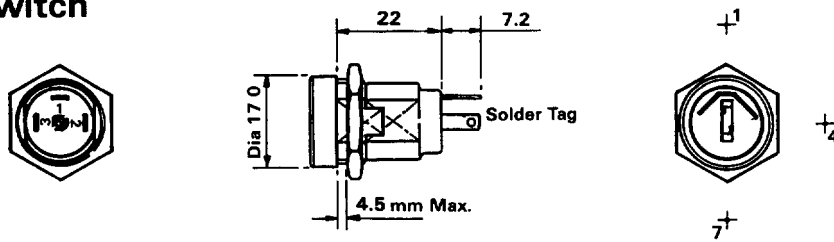

BASIC PART NO	TOTAL MOVEMENT	INDEXING	KEY WITHDRAWAL POSITIONS	SWITCH CONFIGURATION
SRL-5-A	90°	90°	1,4	1 ——— 2
SRL-5-B	90°	90°	1 Only	1 ——— 3
SRL-5-C	180°	90°	1,4,7	1 ——— 2 3

Single Pole Lockswitch


Tapered Lock Head
90° Indexing

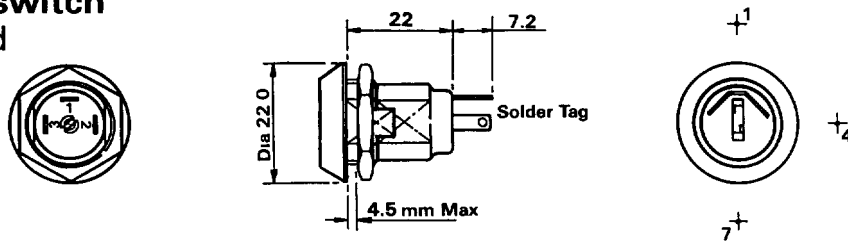

BASIC PART NO	TOTAL MOVEMENT	INDEXING	KEY WITHDRAWAL POSITIONS	SWITCH CONFIGURATION
SRL-5-D	90°	90°	1,4	1 ——— 2
SRL-5-E	90°	90°	1 Only	1 ——— 3
SRL-5-F	180°	90°	1,4,7	1 ——— 2 3

Double Pole Lockswitch


Parallel Lock Head
60° Indexing

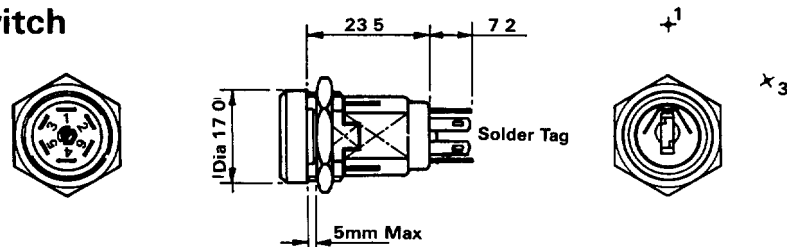

BASIC PART NO	TOTAL MOVEMENT	INDEXING	KEY WITHDRAWAL POSITIONS	SWITCH CONFIGURATION
SRL-5-J	60°	60°	1,3	1 ——— 4
SRL-5-K	60°	60°	1 Only	2 ——— 3 5 ——— 6

Double Pole Lockswitch

Tapered Lock Head
60° Indexing

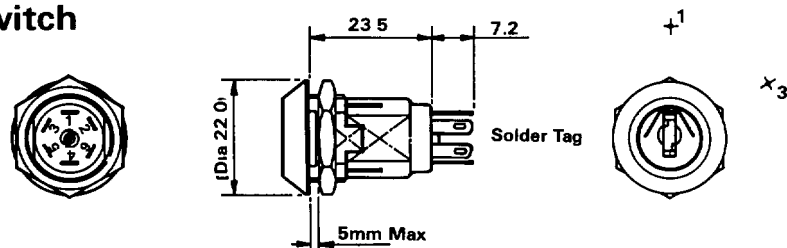

BASIC PART NO	TOTAL MOVEMENT	INDEXING	KEY WITHDRAWAL POSITIONS	SWITCH CONFIGURATION
SRL-5-L	60°	60°	1,3	1 ——— 4
SRL-5-M	60°	60°	1 Only	2 ——— 3 5 ——— 6