MATERIALS AND FINISHES

BODY BRASS
PLATED FOLD

CENTER CONTACT BRASS
PLATED GOLD

INSULATOR PTFE

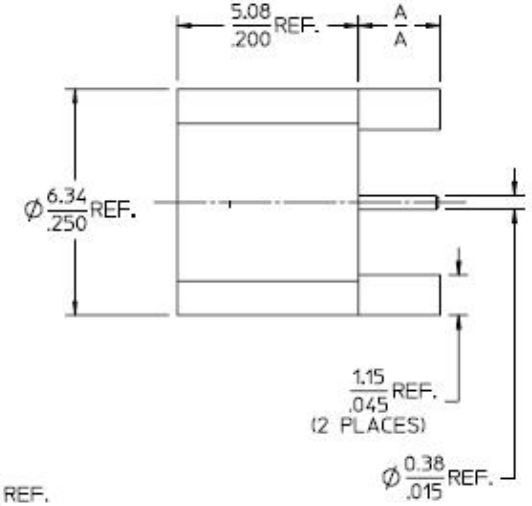

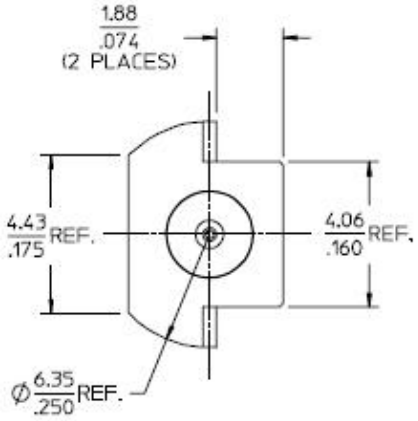



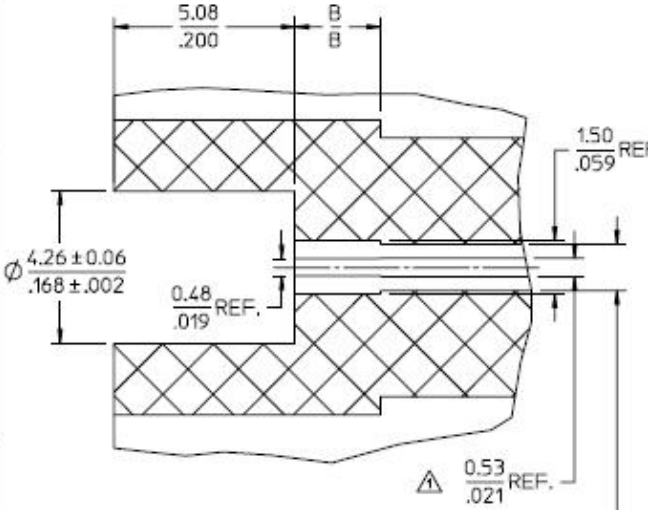

RECOMMENDED PCB LAYOUT

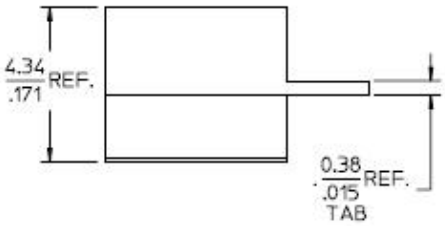

⚠1 DIMENSIONS APPLICABLE FOR ROGERS 4350 PCB MATERIAL ONLY

73415-3593	PLACE 73415-3591 INTO SMALL TRAY 89707-0380
73415-3592	PLACE 73415-3590 INTO SMALL TRAY 89707-0380
PART NO.	DESCRIPTION

73415-3591	.050 REF	1.27 REF	.055	1.40
73415-3590	.090 REF	2.29 REF	.095	2.41
PART NO.	IN	MM	IN	MM
	DIM A		DIM B	

PS-89675-3320	PRODUCT SPECIFICATION
MIL-STD-348A, FIG. 326-3	INTERFACE
SPECIFICATION	DESCRIPTION

CHG: ADDED -3592, -3593 2007/02/05
EC NO: URF2007-0311 2007/02/05
DRAWN: CLL1 2007/02/05
CHKD:
APPR: MHUANG
REV DESCRIPTION

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

A4

DIMENSION STYLE: MM/IN
SCALE
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: SSS DATE: 2007/07/18
CHECKED BY: TEL DATE: 2007/07/18
APPROVED BY: GMH DATE: 2007/07/18

TITLE: SMP PLUG, PCB EDGEMOUNT 50 OHMS LIMITED DETENT SMP-P/PCB

molex MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-73415-359
SHEET NO.: 1 OF 1

SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION