MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-2RN28

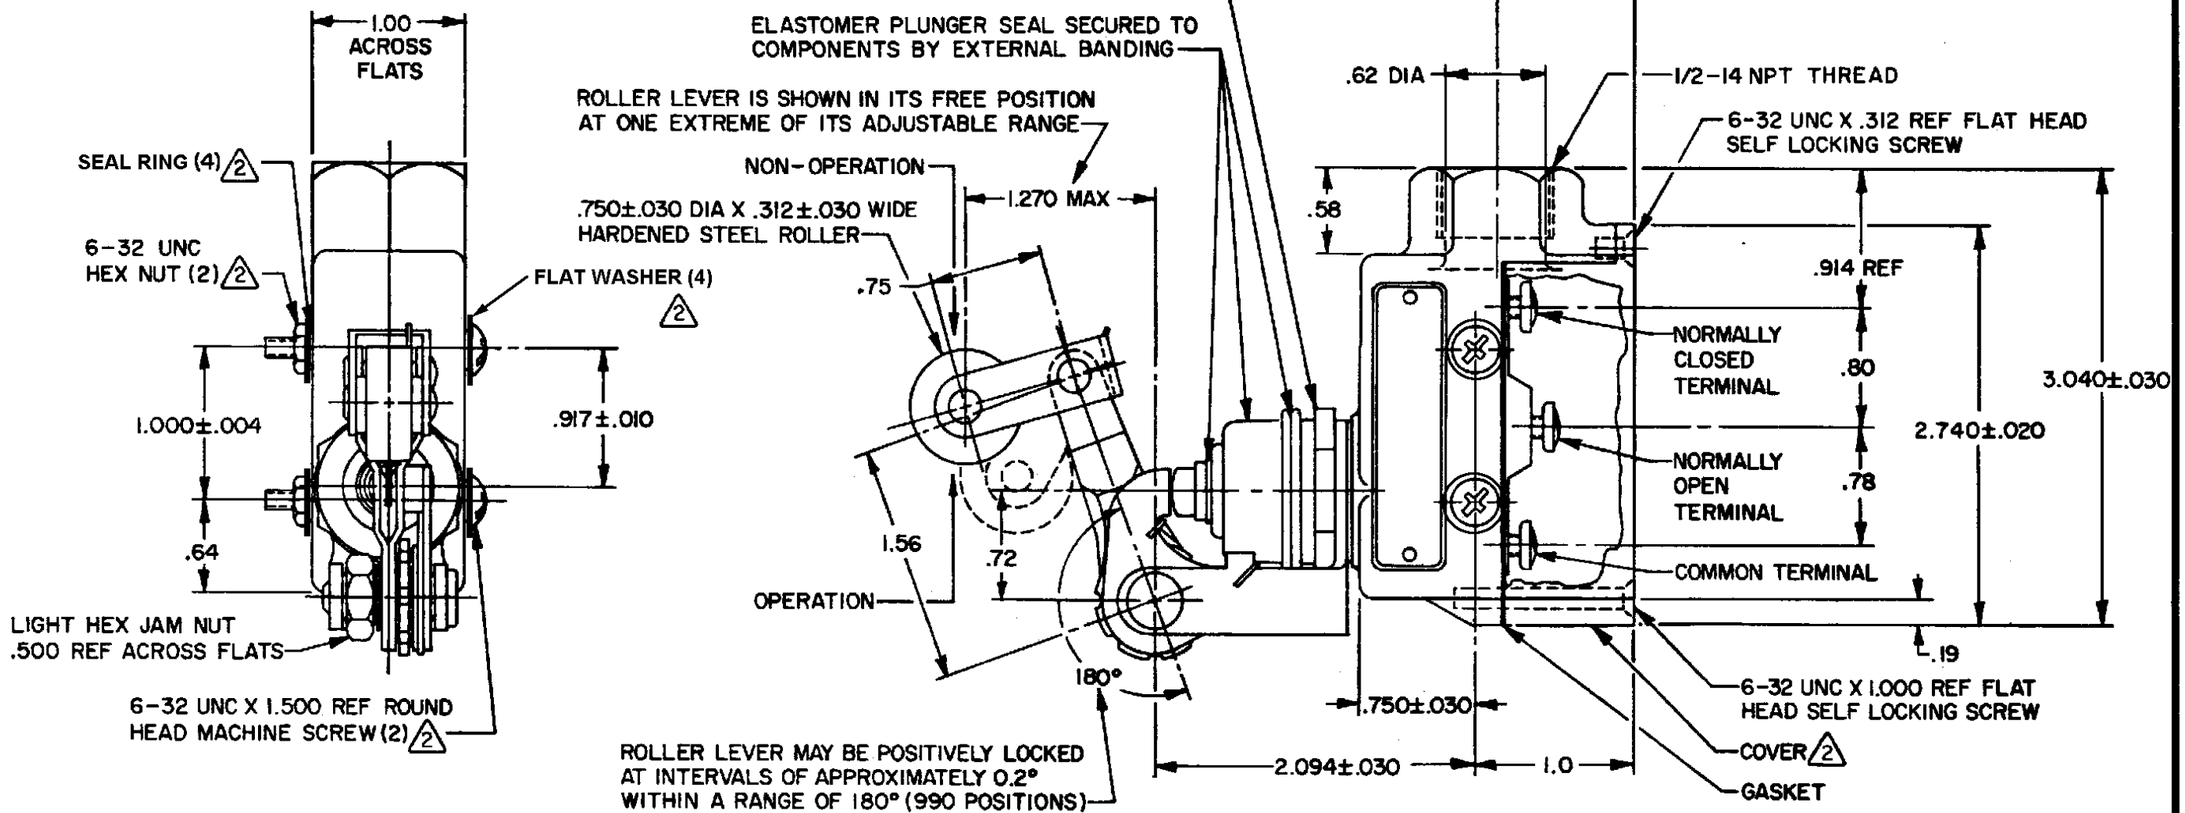

NOTES-

1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3) FURNISHED UNASSEMBLED
2
3 - ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER
4 - SEAL RATING: NEMA 1,3
IP54

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	
OPERATING FORCE	8-20 OZ
RELEASE FORCE	6 OZ MIN
PRETRAVEL	.234 MAX
DIFFERENTIAL TRAVEL	.006 MAX
OVERTRAVEL	.219 MIN
BASIC SWITCH REPLACEMENT	BZ-2RN702

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

15A-125, 250 OR 480 VAC, 2A-600 VAC
1/8 HP-125 VAC; 1/4 HP-250 VAC
1/2A-125 VDC; 1/4A-250 VDC
CODE L74
CE 1.5A, 240 Vac

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±2°

WEIGHT .71 LB

REVISIONS										
A	CO-38200	S L B 26 AUG 77								
B	C053191F	TSR 13 APR 84								
C	C055989	J A P 8 NOV 84								
D	C054956	G J W 7 JAN 85								
E	C072476	MAM 4 SEP 92								
F	CO-77179A	K D R 17 FEB 94								
G	0017057	VKR 22NOV05								

DRAWN	S L B	26 AUG 77								
CHECK	K P K	31 AUG 77								
CHECK										
ISSUE	11	BP	22NOV05							
DRAWING NUMBER	M BZE6-2RN28									
RELEASE NO.										
REPLACES										

FO-8251-A