

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.


SPECIFICATIONS

SI LONTONS							
PARAMETERS	VALUES	UNITS					
DIRECTIVITY	OMNI	_					
SENSITIVITY	-46±3	dB					
STANDARD OPERATING VOLTAGE	1.5	Vdc					
MAX OPERATING VOLTAGE	10	Vdc					
CURRENT CONSUMPTION (MAX)	0.5	mA					
IMPEDANCE	2,200	K Ohm					
SIGNAL TO NOISE RATIO	60	dB					
TERMINAL	SOLDER PADS	_					

	REVISIONS							
LTR	DESCRIPTION	DATE	APPROVED					
_	RELEASED FROM ENGINEERING	11/13/03						





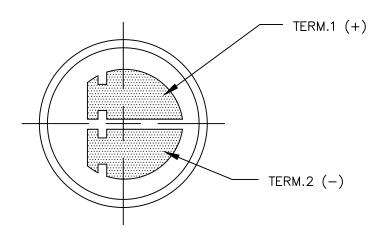

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.

FILE NAME
AOM-4546L.DWG

	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3".			projects © unlimited Dayton , Ohio				
				MICROPHONE				
		APPROVALS DATE $AOM-4546I$				5461		
	DRAWN R.A.C.	11/03	11/03					
APPROVED R. W. 11,		11/03	SIZE		DRAWING			
			AOM-4546L					
	DO NOT SCALE DRAWING		SCA	LE: N.T.S.		SHEET 1	OF	1