


**Shield (screen) clamping saddle,
27 mm / 1.063 in wide**
For conductors with a diameter of
6 mm / 0.236 in to 24 mm / 0.944 in

**Shield (screen) clamping saddle,
43 mm / 1.693 in wide**
For conductors with a diameter of
22 mm / 0.866 in to 40 mm / 1.575 in



Item-No.	Pack.-unit pcs	Item-No.	Pack.-unit pcs
Shield (screen) clamping saddle, 27 mm / 1.063 in wide 6 mm / 0.236 in to 24 mm / 0.944 in		Shield (screen) clamping saddle, 43 mm / 1.693 in wide 22 mm / 0.866 in to 40 mm / 1.575 in	
790-124	50	790-140	50
45 mm / 1.772 in long		45 mm / 1.772 in long	
790-113	25	790-113	25
45 mm / 1.772 in long		45 mm / 1.772 in long	
790-114	25	790-114	25
125 mm / 4.921 in long		125 mm / 4.921 in long	
790-115	25	790-115	25
790-145	1	790-145	1
790-144	200 (2 x 100)	790-144	200 (2 x 100)
1000 mm / 3'3" long	210-133 20 (20 x 1)	1000 mm / 3'3" long	210-133 20 (20 x 1)
30 mm / 1.181 in long	790-133 20 (20 x 1)	30 mm / 1.181 in long	790-133 20 (20 x 1)
50 mm / 1.969 in long	790-134 20 (20 x 1)	50 mm / 1.969 in long	790-134 20 (20 x 1)
grey	790-100 50 (2 x 25)	grey	790-100 50 (2 x 25)
grey	790-101 50 (2 x 25)	grey	790-101 50 (2 x 25)
suitable for I/O modules, series 750		suitable for I/O modules, series 750	
length for 5 I/O modules	790-190 25 (5 x 5)	length for 5 I/O modules	790-190 25 (5 x 5)
length for 8 I/O modules	790-191 25 (25 x 1)	length for 8 I/O modules	790-191 25 (25 x 1)

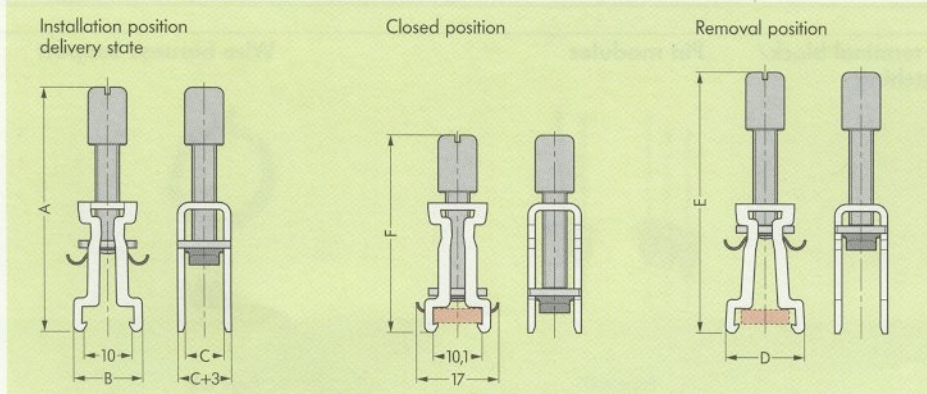

Item-No.	Dimensions in mm					
	A	B	C	D	E	F
790-108	51	15	8	16	55	42
790-116	53	15	16	16	57	45
790-124	78	15	24	16	83	58
790-140	97	15	40	16	100	73