

Data Sheet August 16, 2005 FN3282.9

Monolithic Quad SPST, CMOS Analog Switches

The DG411 series monolithic CMOS analog switches are drop-in replacements for the popular DG211 and DG212 series devices. They include four independent single pole throw (SPST) analog switches, and TTL and CMOS compatible digital inputs.

These switches feature lower analog ON resistance ($<35\Omega$) and faster switch time (t_{ON} < 175ns) compared to the DG211 or DG212. Charge injection has been reduced, simplifying sample and hold applications.

The improvements in the DG411 series are made possible by using a high voltage silicon-gate process. An epitaxial layer prevents the latch-up associated with older CMOS technologies. The 44V maximum voltage range permits controlling $40V_{P-P}$ signals. Power supplies may be single-ended from +5V to +34V, or split from $\pm 5V$ to $\pm 20V$.


The four switches are bilateral, equally matched for AC or bidirectional signals. The ON resistance variation with analog signals is quite low over a $\pm 15 V$ analog input range. The switches in the DG411 and DG412 are identical, differing only in the polarity of the selection logic. Two of the switches in the DG413 (#1 and #4) use the logic of the DG211 and DG411 (i.e., a logic "0" turns the switch ON) and the other two switches use DG212 and DG412 positive logic. This permits independent control of turn-on and turn-off times for SPDT configurations, permitting "break-before-make" or "make-before-break" operation with a minimum of external logic.

TRUTH TABLE

	DG411	DG412	DG413		
LOGIC	SWITCH	SWITCH	SWITCH 1, 4	SWITCH 2, 3	
0	On	Off	Off	On	
1	Off	On	On	Off	

NOTE: Logic "0" ≤0.8V. Logic "1" ≥2.4V.

Pinout DG411, DG412, DG413 (PDIP, SOIC)



Features

•	ON Resistance (Max)	. 35Ω
•	Low Power Consumption (P _D)	<35μW
•	Fast Switching Action	
	- t _{ON} (Max)	175ns
	- t _{OFF} (Max)	145ns

- · Low Charge Injection
- Upgrade from DG211/DG212
- · TTL, CMOS Compatible
- · Single or Split Supply Operation
- · Pb-Free Plus Anneal Available (RoHS Compliant)

Applications

- · Audio Switching
- · Battery Operated Systems
- · Data Acquisition
- · Hi-Rel Systems
- · Sample and Hold Circuits
- · Communication Systems
- · Automatic Test Equipment

Ordering Information


PART NUMBER	TEMP. RANGE (°C)	PACKAGE	PKG. DWG. #
DG411DJ	-40 to 85	16 Ld PDIP	E16.3
DG411DJZ (Note)	-40 to 85	16 Ld PDIP** (Pb-free)	E16.3
DG411DY*	-40 to 85	16 Ld SOIC	M16.15
DG411DYZ* (Note)	-40 to 85	16 Ld SOIC (Pb-free)	M16.15
DG412DJ	-40 to 85	16 Ld PDIP	E16.3
DG412DY*	-40 to 85	16 Ld SOIC	M16.15
DG412DYZ* (Note)	-40 to 85	16 Ld SOIC (Pb-free)	M16.15
DG413DJ	-40 to 85	16 Ld PDIP	E16.3
DG413DJZ (Note)	-40 to 85	16 Ld PDIP** (Pb-free)	E16.3
DG413DY*	-40 to 85	16 Ld SOIC	M16.15
DG413DYZ* (Note)	-40 to 85	16 Ld SOIC (Pb-free)	M16.15

NOTE: Intersil Pb-free plus anneal products employ special Pb-free material sets; molding compounds/die attach materials and 100% matte tin plate termination finish, which are RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.


^{*}Add "-T" suffix for tape and reel.

^{**}Pb-free PDIPs can be used for through hole wave solder processing only. They are not intended for use in Reflow solder processing applications.

Functional Diagrams Four SPST Switches per Package Switches Shown for Logic "1" Input

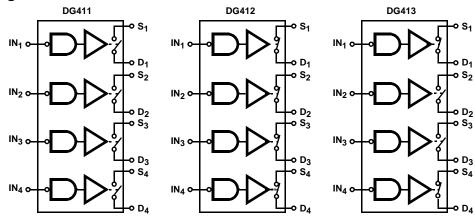

Schematic Diagram (1 Channel)

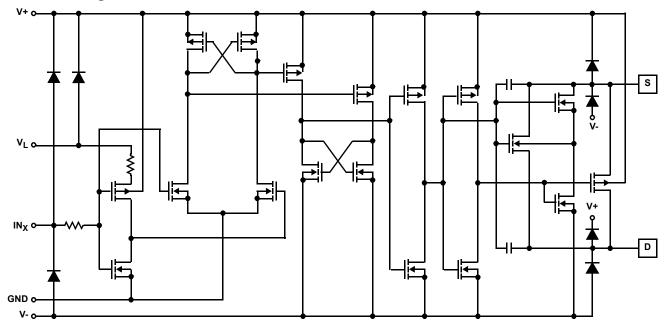

Pin Descriptions

PIN	SYMBOL	DESCRIPTION
1	IN ₁	Logic Control for Switch 1.
2	D ₁	Drain (Output) Terminal for Switch 1.
3	S ₁	Source (Input) Terminal for Switch 1.
4	V-	Negative Power Supply Terminal.
5	GND	Ground Terminal (Logic Common).
6	S ₄	Source (Input) Terminal for Switch 4.
7	D_4	Drain (Output) Terminal for Switch 4.
8	IN ₄	Logic Control for Switch 4.
9	IN ₃	Logic Control for Switch 3.
10	D_3	Drain (Output) Terminal for Switch 3.
11	S_3	Source (Input) Terminal for Switch 3.
12	V_{L}	Logic Reference Voltage.
13	V+	Positive Power Supply Terminal (Substrate).
14	S ₂	Source (Input) Terminal for Switch 2.
15	D ₂	Drain (Output) Terminal for Switch 2.
16	IN ₂	Logic Control for Switch 2.

Absolute Maximum Ratings

V+ to V
GND to V
V _L (GND -0.3V) to (V+) +0.3V
Digital Inputs, V_S , V_D (Note 1) (V-) -2V to (V+) + 2V or 30mA,
Whichever Occurs First
Continuous Current (Any Terminal)
Peak Current, S or D (Pulsed 1ms, 10% Duty Cycle Max) 100mA

Operating Conditions

Voltage Range	±20V (Max)
Temperature Range	40°C to 85°C
Input Low Voltage	0.8V (Max)
Input High Voltage	2.4V (Min)
Input Rise and Fall Time	≤20ns

Thermal Information

Thermal Resistance (Typical, Note 2)	θ _{JA} (°C/W)
PDIP Package*	90
SOIC Package	
Maximum Junction Temperature (Plastic Packages)	150°C
Maximum Storage Temperature Range6	5°C to 150°C
Maximum Lead Temperature (Soldering 10s)	300°C
(SOIC - Lead Tips Only)	

*Pb-free PDIPs can be used for through hole wave solder processing only. They are not intended for use in Reflow solder processing applications.

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTES:

- 1. Signals on S_X, D_X, or IN_X exceeding V+ or V- will be clamped by internal diodes. Limit forward diode current to maximum current ratings.
- 2. θ_{JA} is measured with the component mounted on a low effective thermal conductivity test board in free air. See Tech Brief TB379 for details.

Electrical Specifications Test Conditions: V+ = +15V, $V_- = -15V$, $V_L = 5V$, $V_{IN} = 2.4V$, 0.8V (Note 3), Unless Otherwise Specified

PARAMETER	TEST CONDITIONS	TEMP (°C)	(NOTE 4)	(NOTE 5)	(NOTE 4) MAX	UNITS
DYNAMIC CHARACTERISTICS						
Turn-ON Time, t _{ON}	$R_L = 300\Omega$, $C_L = 35pF$, $V_S = \pm 10V$ (Figure 1)	25	-	110	175	ns
		85	-	-	220	ns
Turn-OFF Time, t _{OFF}		25	-	100	145	ns
		85	-	-	160	ns
Break-Before-Make Time Delay	DG413 Only, $R_L = 300\Omega$, $C_L = 35pF$ (Figure 2)	25	-	25	-	ns
Charge Injection, Q (Figure 3)	$C_L = 10$ nF, $V_G = 0$ V, $R_G = 0$ Ω	25	-	5	-	pC
OFF Isolation (Figure 5)	$R_L = 50\Omega$, $C_L = 5pF$, $f = 1MHz$	25	-	68	-	dB
Crosstalk (Channel-to-Channel), (Figure 4)		25	-	-85	-	dB
Source OFF Capacitance, C _{S(OFF)}	f = 1MHz (Figure 6)	25	-	9	-	pF
Drain OFF Capacitance, C _{D(OFF)}		25	-	9	-	pF
Channel ON Capacitance, C _{D(ON)} + C _{S(ON)}		25	-	35	-	pF
DIGITAL INPUT CHARACTERISTIC	s					
Input Current V _{IN} Low, I _{IL}	V _{IN} Under Test = 0.8V, All Others = 2.4V	Full	-0.5	0.005	0.5	μА
Input Current V _{IN} High, I _{IH}	V _{IN} Under Test = 2.4V, All Others = 0.8V	Full	-0.5	0.005	0.5	μА
ANALOG SWITCH CHARACTERIS	TICS	•				
Analog Signal Range, V _{ANALOG}	I _S = ∓10mA	Full	-15	-	15	V
Drain-Source ON Resistance,	$I_S = \mp 10$ mA, $V_D = \pm 8.5$ V, V+ = 13.5V, V- = -13.5V	25	-	25	35	Ω
rds(on)		Full	-	-	45	Ω

DG411, DG412, DG413

Electrical Specifications

Test Conditions: V+ = +15V, V- = -15V, V_L = 5V, V_{IN} = 2.4V, 0.8V (Note 3), Unless Otherwise Specified **(Continued)**

PARAMETER	TEST CONDITIONS	TEMP (°C)	(NOTE 4) MIN	(NOTE 5) TYP	(NOTE 4) MAX	UNITS
Source OFF Leakage Current,	V+ = 16.5V, V- = -16.5V, V_D = ± 15.5 V, V_S = ∓ 15.5 V	25	-0.25	±0.1	0.25	nA
IS(OFF)		Full	-5	-	+5	nA
Drain OFF Leakage Current,		25	-0.25	±0.1	0.25	nA
ID(OFF)		Full	-5	-	+5	nA
Channel ON Leakage Current,	V+ = 16.5V, V- = -16.5V, $V_S = V_D = \pm 15.5V$	25	-0.4	±0.1	0.4	nA
I _D (ON) + I _S (ON)		Full	-10	-	+10	nA
POWER SUPPLY CHARACTERIS	rics		ı	II.	<u>I</u>	
Positive Supply Current, I+	V+ = 16.5V, V- = -16.5V, V _{IN} = 0V or 5V	25	-	0.0001	1	μА
		85		-	5	μА
Negative Supply Current, I-		25	-1	-0.0001	-	μА
		85	-5	-	-	μА
Logic Supply Current, I _L		25	-	0.0001	1	μА
		85	-	-	5	μА
Ground Current, I _{GND}		25	-1	-0.0001	-	μА
		85	-5	-	-	μА

Electrical Specifications

(Single Supply) Test Conditions: V+ = +12V, V- = 0V, V_L = 5V, V_{IN} = 2.4V, 0.8V (Note 3), Unless Otherwise Specified

PARAMETER	TEST CONDITIONS	TEMP (°C)	(NOTE 4) MIN	(NOTE 5) TYP	(NOTE 4) MAX	UNITS		
DYNAMIC CHARACTERISTICS								
Turn-ON Time, t _{ON}	$R_L = 300\Omega$, $C_L = 35pF$,	25	-	175	250	ns		
	V _S = 8V, (Figure 1)	85	-	-	315	ns		
Turn-OFF Time, t _{OFF}		25	-	95	125	ns		
		85	-	-	140	ns		
Break-Before-Make Time Delay	DG413 Only, $R_L = 300\Omega$, $C_L = 35pF$, $V_S = 8V$	25	-	25	-	ns		
Charge Injection, Q	$C_L = 10nF, V_G = 6.0V, R_G = 0\Omega$	25	-	25	-	pC		
ANALOG SWITCH CHARACTERIS	STICS	I .						
Analog Signal Range, V _{ANALOG}		Full	0	-	12	V		
Drain-Source ON Resistance, $I_S = -10 \text{mA}, V_D = \text{V+} = 10.8 \text{V}$	I _S = -10mA, V _D = 3V, 8V	25	-	40	80	Ω		
	V+ = 10.8V	Full	-	-	100	Ω		

Electrical Specifications

(Single Supply) Test Conditions: V+ = +12V, V- = 0V, $V_L = 5V$, $V_{IN} = 2.4V$, 0.8V (Note 3), Unless Otherwise Specified **(Continued)**


PARAMETER	TEST CONDITIONS	TEMP (°C)	(NOTE 4) MIN	(NOTE 5) TYP	(NOTE 4) MAX	UNITS		
POWER SUPPLY CHARACTERISTICS								
Positive Supply Current, I+	V+ = 13.2V, V- = 0V	25	-	0.0001	1	μΑ		
	V _{IN} = 0V or 5V	85	-	-	5	μΑ		
Negative Supply Current, I-		25	-1	-0.0001	-	μΑ		
		85	-5	-	-	μΑ		
Logic Supply Current, I _L		25	-	0.0001	1	μΑ		
		85	-	-	5	μΑ		
Ground Current, I _{GND}		25	-1	-0.0001	-	μΑ		
		85	-5	-	-	μΑ		

NOTES:


- 3. V_{IN} = input voltage to perform proper function.
- 4. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- 5. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.

Test Circuits and Waveforms

 V_O is the steady state output with the switch on. Feedthrough via switch capacitance may result in spikes at the leading and trailing edge of the output waveform.



NOTE: Logic input waveform is inverted for switches that have the opposite logic sense.



Repeat test for all IN and S.

For load conditions, see Specifications. C_L includes fixture and stray capacitance. R_I

 $V_O = V_S \frac{R_L}{R_L + r_{DS(ON)}}$

FIGURE 1B. TEST CIRCUIT

FIGURE 1A. MEASUREMENTS POINTS

FIGURE 1. SWITCHING TIMES




FIGURE 2A. MEASUREMENT POINTS






FIGURE 2B. TEST CIRCUITS

FIGURE 2. BREAK-BEFORE-MAKE TIME

Test Circuits and Waveforms (Continued)






NOTE: IN_{χ} dependent on switch configuration, input polarity determined by sense of switch.

FIGURE 3A. TEST CIRCUIT

FIGURE 3B. MEASUREMENT POINTS

FIGURE 3. CHARGE INJECTION






FIGURE 4. CROSSTALK TEST CIRCUIT

6

FIGURE 5. OFF ISOLATION TEST CIRCUIT




FIGURE 6. SOURCE/DRAIN CAPACITANCES TEST CIRCUIT

FN3282.9 August 16, 2005

Application Information

Single Supply Operation

The DG411, DG412, DG413 can be operated with unipolar supplies from 5V to 44V. These devices are characterized and tested for single supply operation at 12V to facilitate the majority of applications. To function properly, 12V is tied to Pins 13 and 0V is tied to Pin 4.

Pin 12 still requires 5V for TTL compatible switching.

Summing Amplifier

When driving a high impedance, high capacitance load such as shown in Figure 7, where the inputs to the summing amplifier have some noise filtering, it is necessary to have shunt switches for rapid discharge of the filter capacitor, thus preventing offsets from occurring at the output.

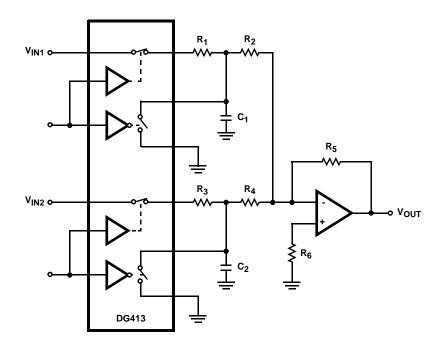


FIGURE 7. SUMMING AMPLIFIER

Typical Performance Curves




FIGURE 8. ON RESISTANCE vs V_D AND POWER SUPPLY VOLTAGE




FIGURE 10. LEAKAGE CURRENTS vs ANALOG VOLTAGE




FIGURE 12. CHARGE INJECTION vs SOURCE VOLTAGE




FIGURE 9. SWITCHING TIME vs TEMPERATURE




FIGURE 11. SUPPLY CURRENT vs INPUT SWITCHING FREQUENCY




FIGURE 13. CHARGE INJECTION vs DRAIN VOLTAGE

Die Characteristics

DIE DIMENSIONS:

 $2760 \mu m \ x \ 1780 \mu m \ x \ 485 \mu m$

METALLIZATION:

Type: SiAI

Thickness: $12k\text{\AA}\pm1k\text{\AA}$

PASSIVATION:

Type: Nitride


Thickness: 8kÅ ±1kÅ

WORST CASE CURRENT DENSITY:


 $1.5 \times 10^5 \text{ A/cm}^2$

Metallization Mask Layout

DG411, DG412, DG413

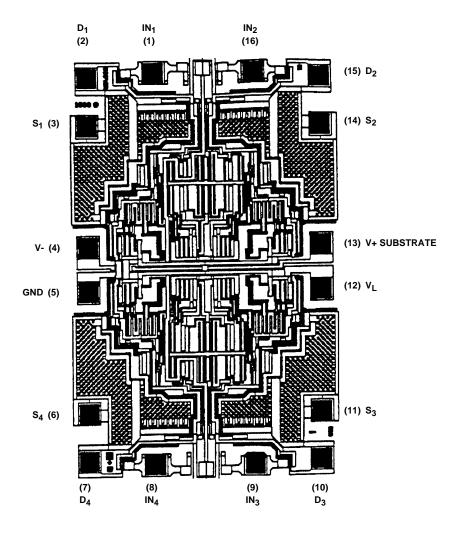

Dual-In-Line Plastic Packages (PDIP)

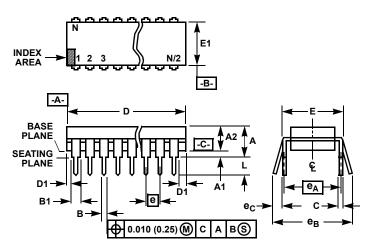

NOTES:


- Controlling Dimensions: INCH. In case of conflict between English and Metric dimensions, the inch dimensions control.
- 2. Dimensioning and tolerancing per ANSI Y14.5M-1982.
- Symbols are defined in the "MO Series Symbol List" in Section 2.2 of Publication No. 95.
- Dimensions A, A1 and L are measured with the package seated in JE-DEC seating plane gauge GS-3.
- D, D1, and E1 dimensions do not include mold flash or protrusions.
 Mold flash or protrusions shall not exceed 0.010 inch (0.25mm).
- 6. E and $\boxed{e_A}$ are measured with the leads constrained to be perpendicular to datum $\boxed{-C-}$.
- 7. e_B and e_C are measured at the lead tips with the leads unconstrained. e_C must be zero or greater.
- B1 maximum dimensions do not include dambar protrusions. Dambar protrusions shall not exceed 0.010 inch (0.25mm).
- 9. N is the maximum number of terminal positions.
- Corner leads (1, N, N/2 and N/2 + 1) for E8.3, E16.3, E18.3, E28.3, E42.6 will have a B1 dimension of 0.030 - 0.045 inch (0.76 - 1.14mm).

E16.3 (JEDEC MS-001-BB ISSUE D)
16 LEAD DUAL-IN-LINE PLASTIC PACKAGE

	INC	HES	MILLIMETERS		
SYMBOL	MIN	MAX	MIN	MAX	NOTES
Α	-	0.210	-	5.33	4
A1	0.015	-	0.39	-	4
A2	0.115	0.195	2.93	4.95	-
В	0.014	0.022	0.356	0.558	-
B1	0.045	0.070	1.15	1.77	8, 10
С	0.008	0.014	0.204	0.355	-
D	0.735	0.775	18.66	19.68	5
D1	0.005	-	0.13	-	5
Е	0.300	0.325	7.62	8.25	6
E1	0.240	0.280	6.10	7.11	5
е	0.100	BSC	2.54	BSC	-
e _A	0.300	BSC	7.62 BSC		6
e _B	-	0.430	-	10.92	7
L	0.115	0.150	2.93	3.81	4
N	1	6	1	6	9

Rev. 0 12/93

Small Outline Plastic Packages (SOIC)

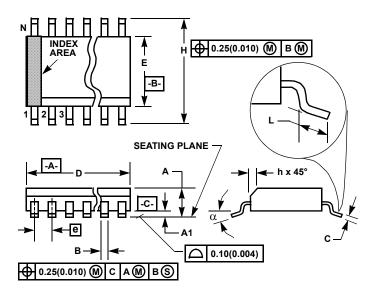

NOTES:

- Symbols are defined in the "MO Series Symbol List" in Section 2.2 of Publication Number 95.
- 2. Dimensioning and tolerancing per ANSI Y14.5M-1982.
- Dimension "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusion and gate burrs shall not exceed 0.15mm (0.006 inch) per side.
- 4. Dimension "E" does not include interlead flash or protrusions. Interlead flash and protrusions shall not exceed 0.25mm (0.010 inch) per side.
- 5. The chamfer on the body is optional. If it is not present, a visual index feature must be located within the crosshatched area.
- 6. "L" is the length of terminal for soldering to a substrate.
- 7. "N" is the number of terminal positions.
- 8. Terminal numbers are shown for reference only.
- 9. The lead width "B", as measured 0.36mm (0.014 inch) or greater above the seating plane, shall not exceed a maximum value of 0.61mm (0.024 inch).
- Controlling dimension: MILLIMETER. Converted inch dimensions are not necessarily exact.

M16.15 (JEDEC MS-012-AC ISSUE C)
16 LEAD NARROW BODY SMALL OUTLINE PLASTIC PACKAGE

	INCHES		MILLIMETERS		
SYMBOL	MIN	MAX	MIN	MAX	NOTES
Α	0.0532	0.0688	1.35	1.75	-
A1	0.0040	0.0098	0.10	0.25	-
В	0.013	0.020	0.33	0.51	9
С	0.0075	0.0098	0.19	0.25	-
D	0.3859	0.3937	9.80	10.00	3
Е	0.1497	0.1574	3.80	4.00	4
е	0.050 BSC		1.27 BSC		-
Н	0.2284	0.2440	5.80	6.20	-
h	0.0099	0.0196	0.25	0.50	5
L	0.016	0.050	0.40	1.27	6
N	16		16		7
α	0°	8°	0°	8°	-

Rev. 1 6/05

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems. Intersil Corporation's quality certifications can be viewed at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com