



SK32A THRU SK310A

3.0 AMPS. Surface Mount Schottky Barrier Rectifiers



Voltage Range
20 to 100 Volts
Current
3.0 Amperes


Features

- ✦ For surface mounted application
- ✦ Metal to silicon rectifier, majority carrier conduction
- ✦ Low forward voltage drop
- ✦ Easy pick and place
- ✦ High surge current capability
- ✦ Plastic material used carriers Underwriters Laboratory Classification 94V-0
- ✦ Epitaxial construction
- ✦ High temperature soldering:
260°C / 10 seconds at terminals

Mechanical Data

- ✦ Case: Molded plastic
- ✦ Terminals: Solder plated
- ✦ Polarity: Indicated by cathode band
- ✦ Packaging: 16mm tape per EIA STD RS-481
- ✦ Weight: 0.21 gram

SMA/DO-214AC

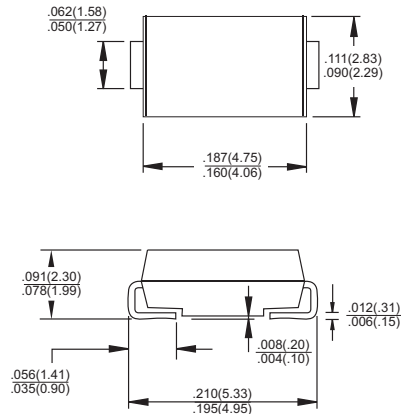

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	SK 32A	SK 33A	SK 34A	SK 35A	SK 36A	SK 39A	SK 310A	Units	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	90	100	V	
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	63	70	V	
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	90	100	V	
Maximum Average Forward Rectified Current at T_L (See Fig. 1)	$I_{(AV)}$	3.0							A	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	70					150		A	
Maximum Instantaneous Forward Voltage (Note 1) @ 3.0A	V_F	0.55			0.75		0.85		V	
Maximum DC Reverse Current @ $T_A = 25^\circ C$ at Rated DC Blocking Voltage @ $T_A = 100^\circ C$	I_R	0.5 10					0.6 5		mA	
Typical Thermal Resistance (Note 2)	$R\theta_{JL}$ $R\theta_{JA}$	28 88							$^\circ C/W$	
Operating Temperature Range	T_J	-55 to +125			-55 to +150				$^\circ C$	
Storage Temperature Range	T_{STG}	-55 to +150								$^\circ C$

Notes: 1. Pulse Test with PW=300 usec, 1% Duty Cycle

2. Measured on P.C.Board with 0.2 x 0.2" (5 x 5mm) Copper Pad Areas.

RATINGS AND CHARACTERISTIC CURVES (SK32A THRU SK310A)

FIG. 1- MAXIMUM FORWARD CURRENT DERATING CURVE

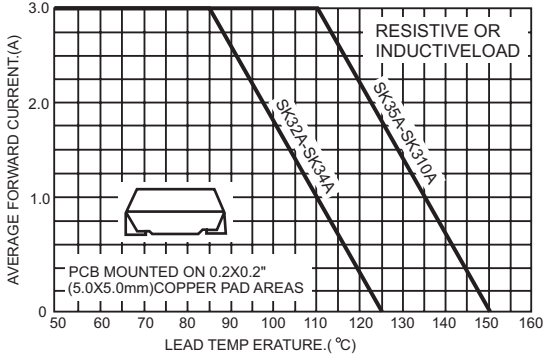


FIG. 2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

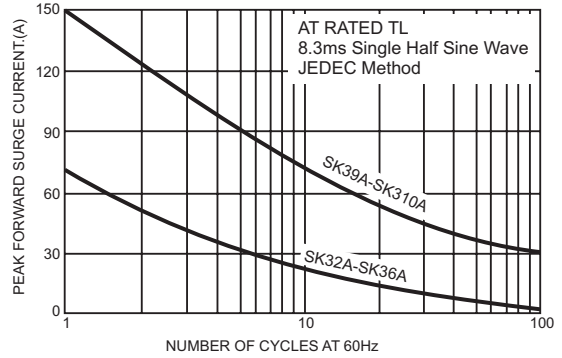


FIG. 3- TYPICAL FORWARD CHARACTERISTICS

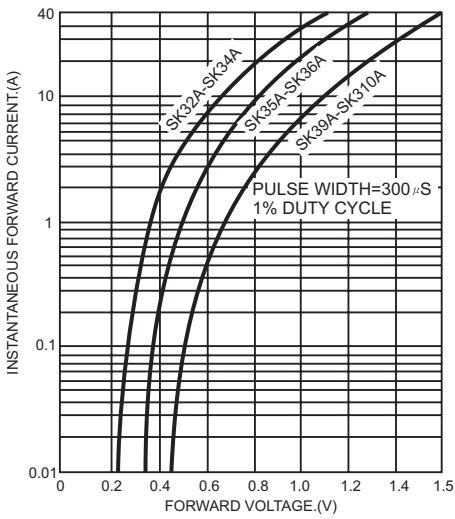


FIG. 4- TYPICAL REVERSE CHARACTERISTICS

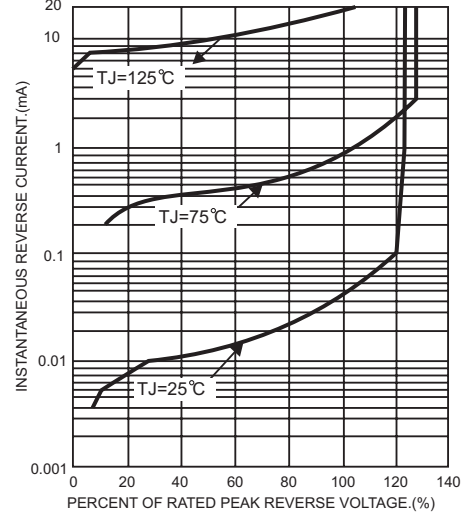


FIG. 5- TYPICAL JUNCTION CAPACITANCE

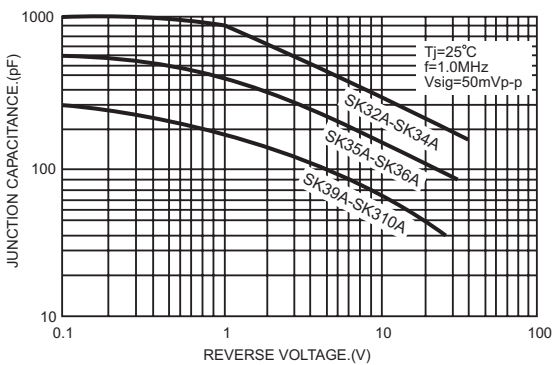


FIG. 6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS

