


1			2			3			4			5			6			7			8		
REVISIONS																							
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE																					

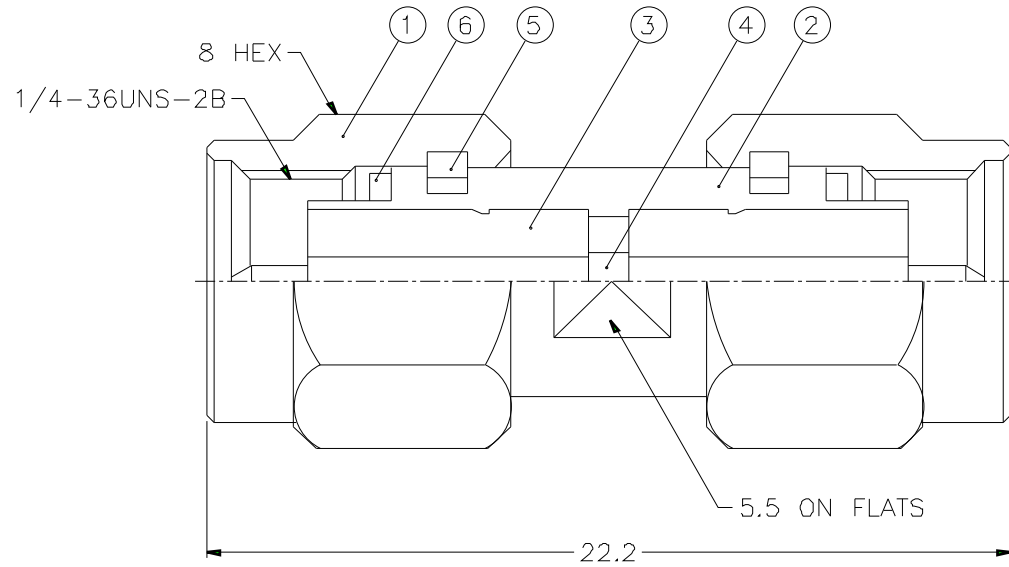

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. BERYLLIUM COPPER PER QQ-C-530
4. GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468

DIMENSIONS ARE IN MILLIMETERS										PART NO. SMA2071A1-3GT50G-50		<b>Amphenol</b>	
6	GASKET	SILICONE	RED	2	GS-6/43X06	UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				APPROVED	DATE		
5	RETAINER RING	NOTE 3	NATURAL	2	SMA5000-4-B					CHECKED	DATE	SMA PLUG ADAPTOR	
4	CONTACT PIN	NOTE 1	NOTE 4	1	SMA5900-4					DRAWN	DATE	DRAWING NO.	
3	INSULATOR	NOTE 5	NATURAL	2	SMA5900-3T-50-A							KJ-SMA2071A1-3GT50G-50	
2	BODY	NOTE 1	NOTE 2	1	SMA5900-2-A							ITEM NO.	
1	SHELL	NOTE 1	NOTE 2	2	SMA5000-1-C								
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	5/1	ISSUE	A	FILE NO			

1			2			3			4			5			6			7			8		
---	--	--	---	--	--	---	--	--	---	--	--	---	--	--	---	--	--	---	--	--	---	--	--